

Overview

- 12 mm
- PNP break function (NC)
- cable, 2 m
- -25 ... 75 °C
- IP 67



Picture similar



Technical data

General data

| | |
|--|---|
| Mounting type | Flush |
| Special type | Enhanced distance (GammaProx) |
| Nominal sensing distance S _n | 12 mm |
| Temperature drift | ± 10 % |
| Hysteresis | 3 ... 20 % of S _r |
| Output indicator | LED red |
| Correction factor typ. | Mild steel 100 %, stainless steel 70 %, aluminum 40 % |

Electrical data

| | |
|---------------------------------------|-------------------------|
| Switching frequency | 400 Hz |
| Voltage supply range +V _s | 6 ... 36 VDC |
| Current consumption max. (no load) | 10 mA |
| Output circuit | PNP break function (NC) |

Electrical data

| | |
|-----------------------------|----------|
| Voltage drop V _d | < 2 VDC |
| Output current | < 100 mA |
| Short circuit protection | Yes |
| Reverse polarity protection | Yes |

Mechanical data

| | |
|-------------------------|----------------------|
| Type | Cylindrical threaded |
| Material (sensing face) | PBT |
| Housing material | Brass nickel plated |
| Dimension | 18 mm |
| Housing length | 35 mm |
| Connection types | Cable, L=2 m |
| Tightening torque max. | 40 Nm |


Ambient conditions

| | |
|-----------------------|----------------|
| Operating temperature | -25 ... +75 °C |
| Protection class | IP 67 |


Remarks

- Increased sensing distance


Dimension drawing

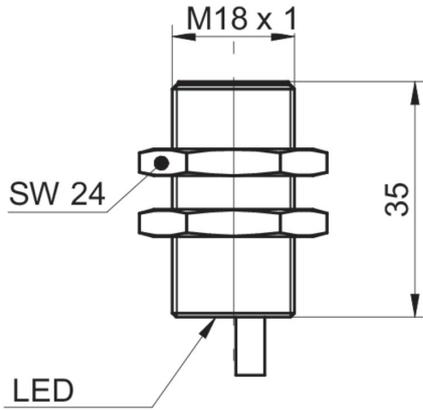


Connection diagram

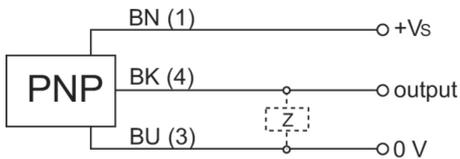

Correction factors for different mounting situation (approx.)

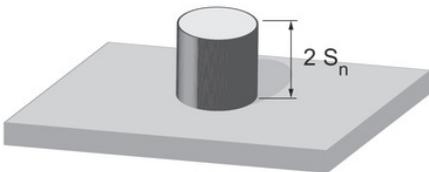

| Mounting material | Correction factor |
|-------------------|-------------------|
| Mild steel | 100 % |
| Stainless steel | 100 % |
| Aluminum | 100 % |

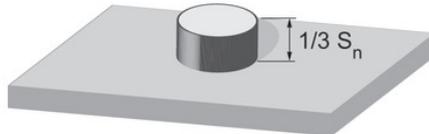

| Mounting material | Correction factor |
|-------------------|-------------------|
| Mild steel | 105 % |
| Stainless steel | 95 % |
| Aluminum | 95 % |



| Mounting material | Correction factor |
|-------------------|-------------------|
| Mild steel | not possible |
| Stainless steel | 110 % |
| Aluminum | 65 % |

Mounting instructions

