

HMG10-B - Incremental

Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)

Overview

- Incremental encoder (optionally programmable)
- HTL/TTL output driver for cable length up to 350 m
- Very high resistance to shock and vibrations
- Two-sided insulated bearing system with hybrid bearings
- Special protection against corrosion CX (C5-M)
- Large terminal box, turn by 180°
- Support plate for torque arm 360° freely positionable
- Mounting compatible with HOG10 encoders
- Function display via LEDs



Picture similar

Technical data

Technical data - electrical ratings

Voltage supply	4.75...30 VDC
Short-circuit proof	Yes
Consumption w/o load	≤100 mA
Initializing time	≤ 500 ms after power on
Pulses per revolution	1 ... 131072
Phase shift	90 ° ±20°
Duty cycle	40...60 %
Reference signal	Zero pulse, width 90°
Sensing method	Magnetic
Output signals	A+, B+, R+, A-, B-, R- Error output nE+, nE-
Output stages	TTL/HTL (Vin = Vout)
Programming interface	RS485 (≤600 m)
Programmable parameters	Pulse number Switch-off and switch-on speeds Switching delay time
Diagnostic function	Function control
Status indicator	4 LEDs in device back side
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	CE UL approval / E217823 EAC

Technical data - electrical ratings (speed switch)

Switching accuracy	± 2 % (or 1 Digit)
Switching outputs	1 output (Open collector)
Output switching capacity	30 VDC; ≤100 mA
Switching hysteresis	10 ... 100 % adjustable

Optional

- Incremental output and speed switch freely programmable or fixed ex works
- Integrated speed switch programmable
- Second incremental output, programmable, not galvanic isolated

Technical data - electrical ratings (speed switch)

Switching delay time	≤20 ms
----------------------	--------

Technical data - mechanical design

Size (flange)	ø105 mm
Shaft type	ø16...20 mm (blind hollow shaft) ø17 mm (cone shaft 1:10)
Admitted shaft load	≤450 N axial ≤650 N radial
Flange	Support plate for torque arm, 360° freely positionable
Protection EN 60529	IP 66/IP 67
Operating speed	≤12000 rpm
Range of switching speed	ns (off) = ±2...12000 rpm, factory setting 6000 rpm
Operating torque typ.	10 Ncm
Rotor moment of inertia	950 gcm²
Material	Housing: aluminium alloy Shaft: stainless steel
Operating temperature	-40...+95 °C
Relative humidity	95 % non-condensing
Resistance	IEC 60068-2-6 Vibration 30 g, 10-2000 Hz IEC 60068-2-27 Shock 400 g, 1 ms
Corrosion protection	IEC 60068-2-52 Salt mist for ambient conditions CX (C5-M) according to ISO 12944-2
Connection	Terminal box Flange connector M23
Weight approx.	1.6 kg

HMG10-B - Incremental

Blind hollow shaft or cone shaft (1:10)


Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)

Terminal assignment

1x terminal box - View B (see dimensions)

Incremental output II

Connection reference -P

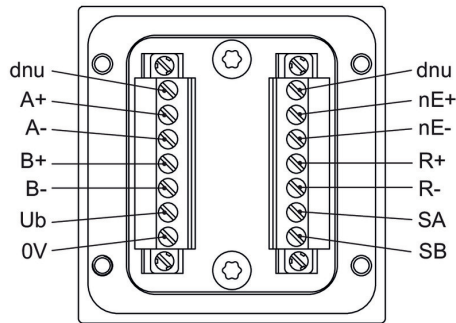


Terminal assignment

2x terminal box - View B (see dimensions)

Incremental output II


Connection reference -M

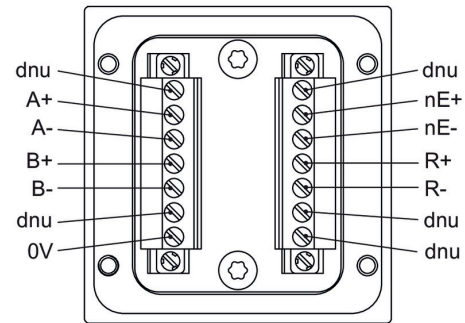

1x terminal box - View B (see dimensions)

Incremental output II + speed switch


Connection reference -P

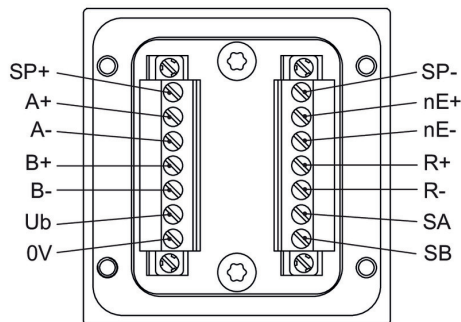

2x terminal box - View B (see dimensions)

Incremental output II + speed switch


Connection reference -M

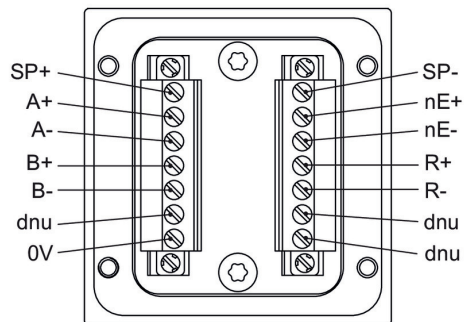

1x terminal box - View B (see dimensions)

Speed switch


Connection reference -P

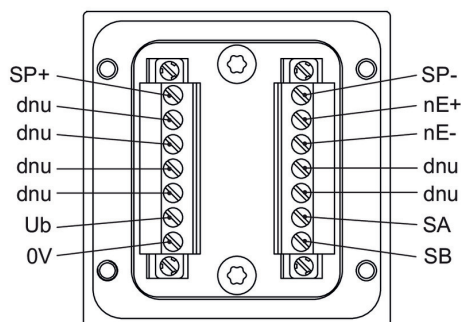

2x terminal box - View A (see dimensions)

Incremental output I

Connection reference -M

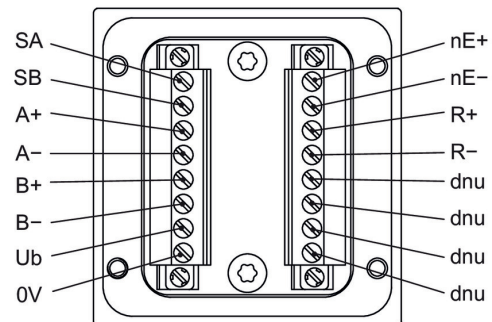

HMG10-B - Incremental

Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)


Terminal assignment

1x flange connector M23 - View B (see dimensions)

Incremental output II

Connection reference -H

Pin	Assignment
1	B-
2	SB
3	R+
4	R-
5	A+
6	A-
7	dnu
8	B+
9	dnu
10	0 V
11	SA
12	Ub



Flange socket M23
(male, 12-pin),
CW


Terminal assignment

1x flange connector M23 - View B (see dimensions)

Speed switch

Connection reference -H

Pin	Assignment
1	dnu
2	SB
3	dnu
4	dnu
5	dnu
6	dnu
7	SP+
8	dnu
9	SP-
10	0 V
11	SA
12	Ub




Flange socket M23
(male, 12-pin),
CW

1x flange connector M23 - View B (see dimensions)

Incremental output II + speed switch

Connection reference -H

Pin	Assignment
1	B-
2	SB
3	R+
4	R-
5	A+
6	A-
7	SP+
8	B+
9	SP-
10	0 V
11	SA
12	Ub



Flange socket M23
(male, 12-pin),
CW

HMG10-B - Incremental

Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)



Terminal assignment

2x flange connector M23 - View B / A (see dimensions)

Incremental output II / incremental output I

Connection reference -L

Pin	View B/Inc. outp. II	View A/Inc. outp. I
1	B-	B-
2	dnu	dnu
3	R+	R+
4	R-	R-
5	A+	A+
6	A-	A-
7	dnu	SA
8	B+	B+
9	dnu	SB
10	0 V	0 V
11	dnu	dnu
12	dnu	Ub





Flange socket M23 (male, 12-pin), CW

2x flange connector M23 - View B / A (see dimensions)

Incremental output II + speed switch / incremental output I

Connection reference -L

Pin	View B/Inc. outp. II + DSL	View A/Inc. outp. I
1	B-	B-
2	dnu	dnu
3	R+	R+
4	R-	R-
5	A+	A+
6	A-	A-
7	SP+	SA
8	B+	B+
9	SP-	SB
10	0 V	0 V
11	dnu	dnu
12	dnu	Ub



Flange socket M23 (male, 12-pin), CW


Terminal significance

Ub	Voltage supply
0V	Ground
A+	Output signal channel 1
A-	Output signal channel 1 inverted
B+	Output signal channel 2 (offset by 90° to channel 1)
B-	Output signal channel 2 inverted
R+	Zero pulse (reference signal)
R-	Zero pulse inverted
nE+	System OK+ / error output
nE-	System OK_ / error output inverted
SP+	DSL_OUT1 / speed switch (Open collector)
SP-	DSL_OUT2 / speed switch (0V)
SA	RS485+ / programming interface
SB	RS485- / programming interface
dnu	Do not use

Output signals

HTL/TTL

Positive rotating direction when looking at the flange (see dimensions)

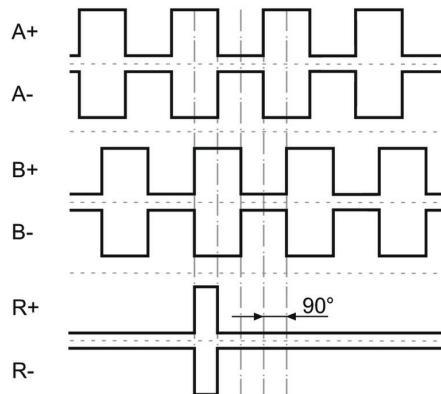


HMG10-B - Incremental


Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)

Dimensions

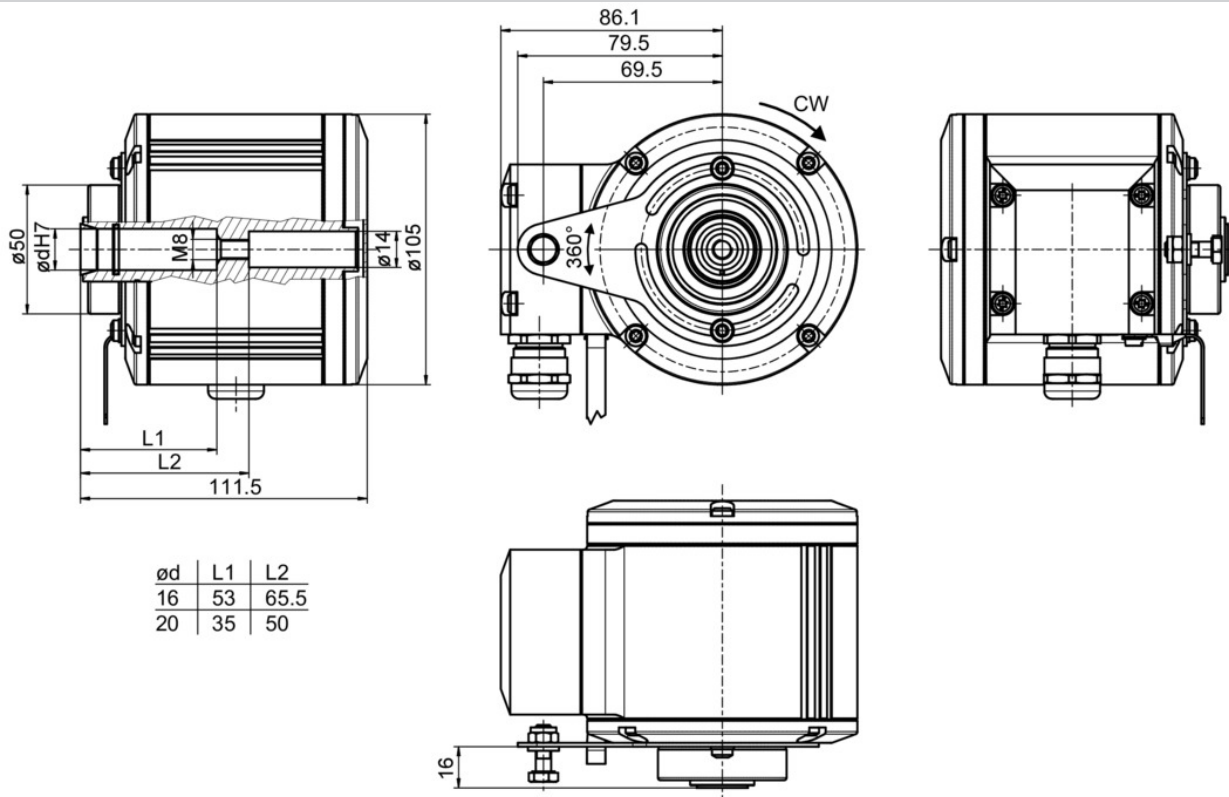

Blind hollow shaft with 1x terminal box (connection reference -P)

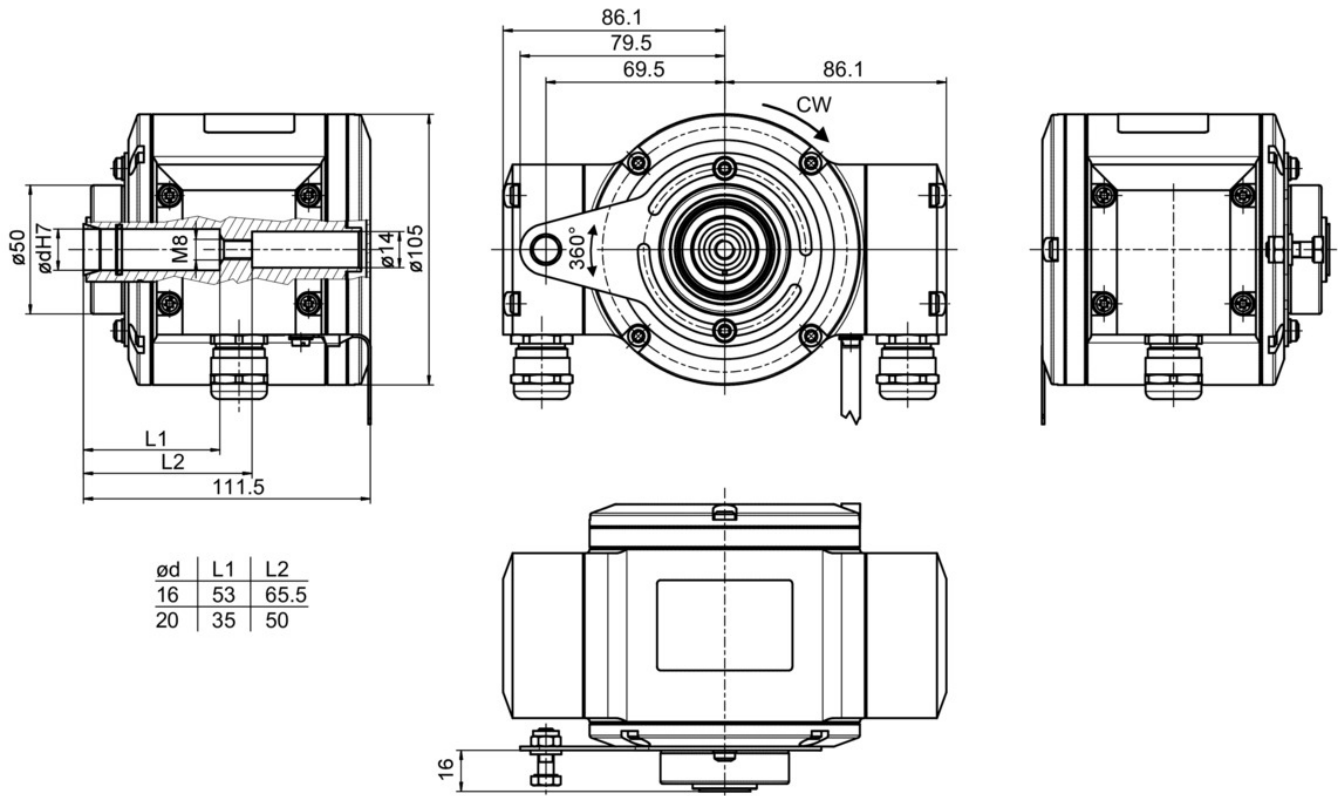


Blind hollow shaft with 2x terminal box (connection reference -M)

HMG10-B - Incremental

Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)

Dimensions

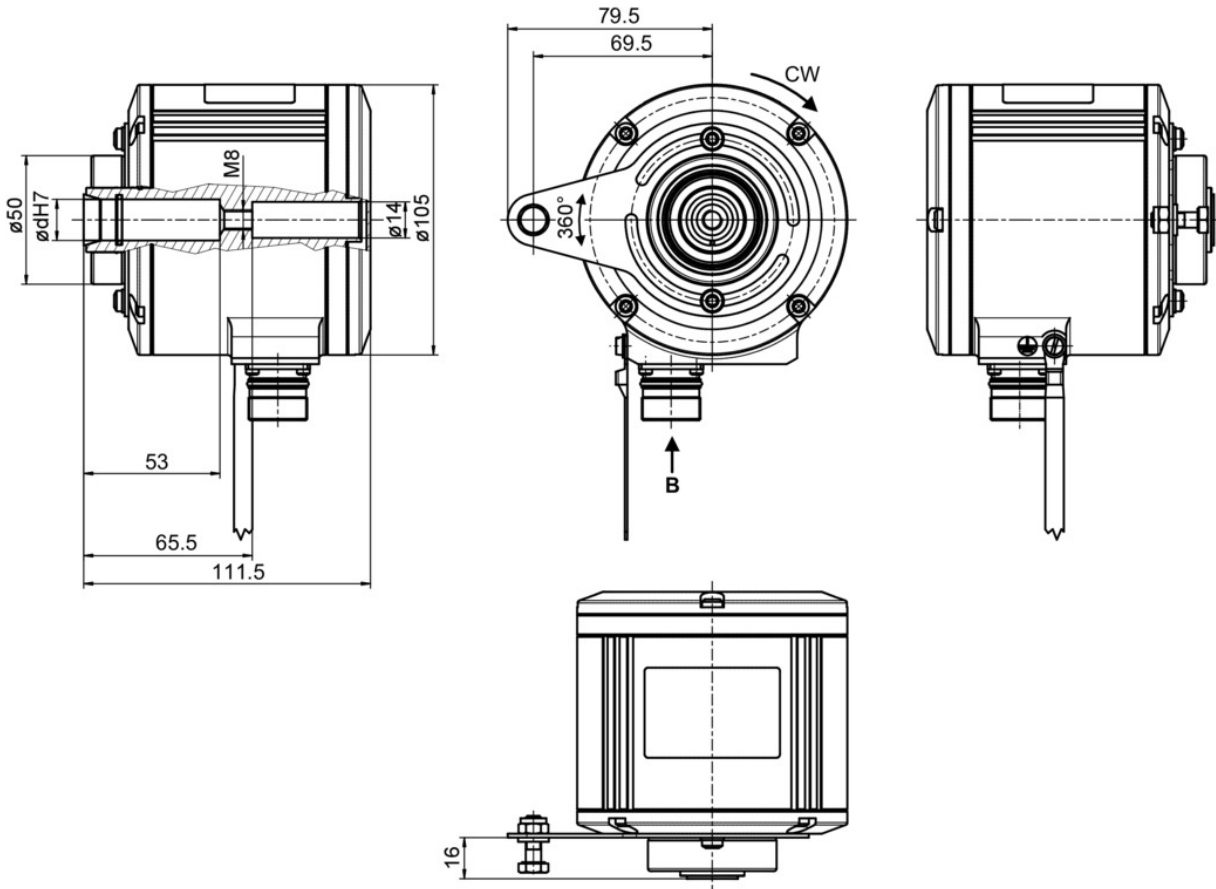


Blind hollow shaft with 1x flange connector M23 (connection reference -H)

HMG10-B - Incremental


Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)

Dimensions

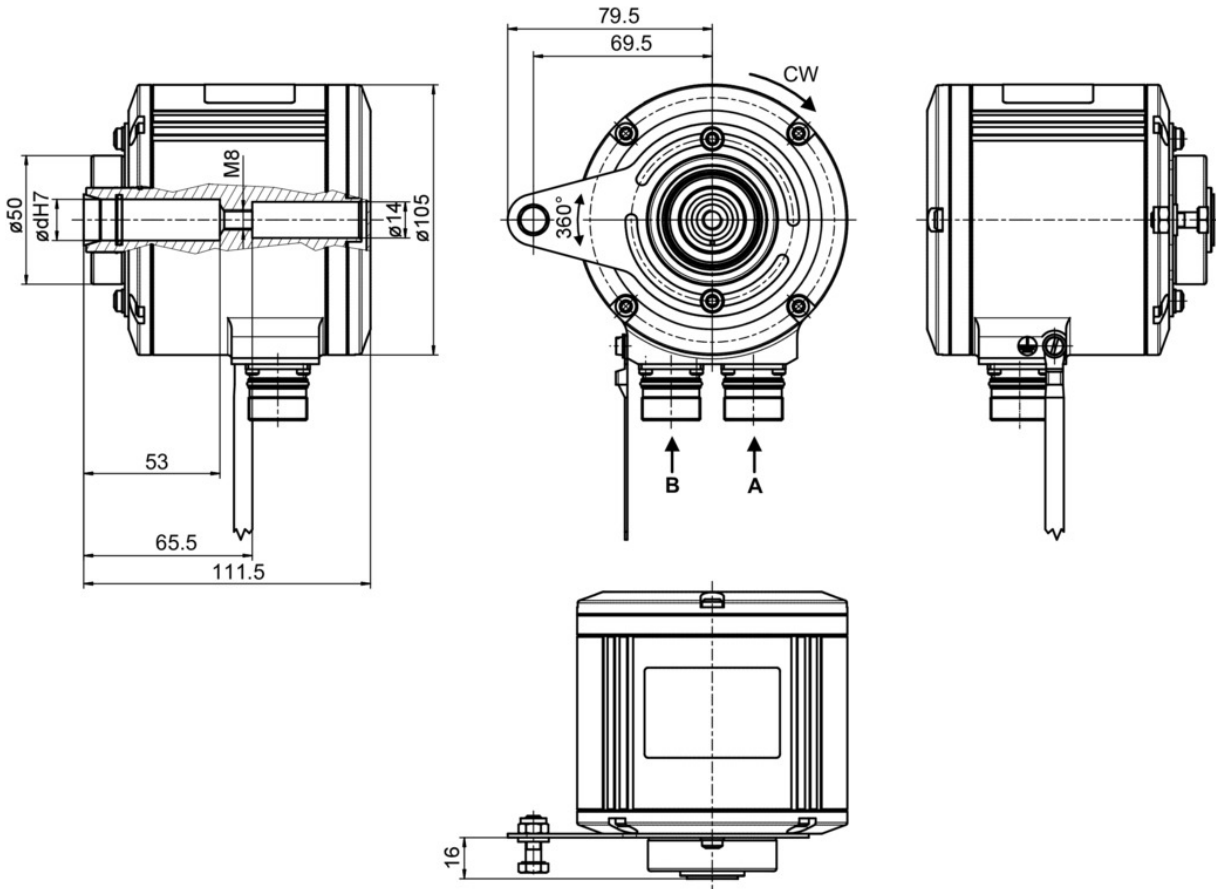

Blind hollow shaft with 2x flange connector M23 (connection reference -L)

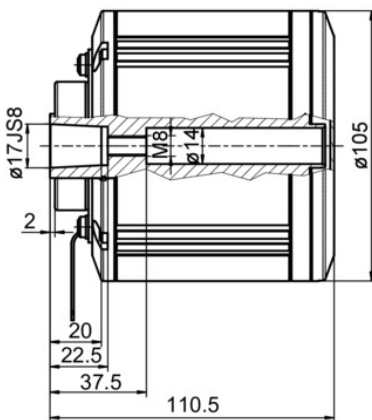

Cone shaft for respective connection (connection reference -P, -M, -H, -L)

HMG10-B - Incremental

Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)

Ordering reference

	HMG10	#	#	-	B	H	#	.	#	#	U0	.	0	0	0	#	#	.	G
Product	HMG10																		
Programmable																			
Non programmable			-																
Programmable			P																
Digital speed switch																			
Without			-																
With			D																
Shaft type																			
Blind hollow shaft					B														
Flange (Hollow shaft)																			
Support (Support plate) for torque arm, hybrid bearings					H														
Protection class																			
IP 66 and IP 67, optimized for dusty, abrasive environment						D													
IP 66 and IP 67, optimized for oily, wet environment						L													
IP 66 and IP 67, optimized for tropical environment						T													
Blind hollow shaft																			
Ø16 mm, central screw										6									
Ø17 mm cone 1:10, central screw										7									
Ø20 mm, central screw										Z									
Connection																			
Terminal box radial, cable gland M20 (assignment incremental / speed switch)											P								
Terminal box 2x radial, cable gland M20											M								
Flange socket radial, M23, 12 pin, male, CW (assignment incremental / speed switch)											H								
Flange socket radial, 2x M23, 12 pin, male, CW (assignment incremental / speed switch)											L								
Supply voltage																			
4,75...30 VDC												U0							
Resolution singleturn position																			
No position signal													0						
Resolution multiturn position																			
No multiturn signal														0					
Resolution speed																			
No speed signal															0				
Resolution supplement I																			
No additional output I																	0		
512 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																	F		
1024 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																	A		
2048 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																	B		
3072 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																	U		
4096 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																	T		
5000 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																	M		
8192 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																	R		

HMG10-B - Incremental

Blind hollow shaft or cone shaft (1:10)

Integrated speed switch - Magnetic sensing - Number of pulses and switching speed freely programmable (option)

Ordering reference

	HMG10	#	#	-	B	H	#	.	#	#	U0	.	0	0	0	#	#	.	G
Resolution supplement II																			
No additional output II																			0
512 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																			F
1024 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																			A
2048 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																			B
3072 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																			U
4096 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																			T
5000 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																			M
8192 ppr TTL/HTL push-pull (Vin=Vout), 6 channels																			R
Operating temperature																			
-40...+95 °C																			G

Accessories

Mounting accessories

11043628	Torque arm M6, length 67...70 mm
11004078	Torque arm M6, length 120...130 mm (≥71 mm)
11002915	Torque arm M6, length 425...460 mm (≥131 mm)
11054917	Torque arm M6 insulated, length 67...70 mm
11072795	Torque arm M6 insulated, length 120...130 mm (≥71 mm)
11082677	Torque arm M6 insulated, length 425...460 mm (≥131 mm)
11077197	Mounting kit for torque arm size M6 and earthing strap
11077087	Mounting and dismounting set

Connectors and cables

	Sensor cable for encoders HEK 8
	Sensor cable for encoders HEK 17
11191144	Programming cable for HMG10P/PMG10P (SSI) with terminal box

Programming accessories

11190106	Z-PA.SDL.1 - WLAN-Adapter
----------	---------------------------