3RT2036-3KB44-3MA0

Data sheet



power contactor, AC-3e/AC-3, 51 A, 22 kW / 400 V, 3-pole, 24 V DC, $0.8-1.2^{\circ}$ Us, with integrated varistor, auxiliary contacts: 2 NO + 2 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2, suitable for PLC outputs, captive auxiliary switch

product brand name	SIRIUS
product designation	Coupling contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
 function module for communication 	No
auxiliary switch	No
power loss [W] for rated value of the current	
 at AC in hot operating state 	12 W
 at AC in hot operating state per pole 	4 W
without load current share typical	1 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at DC	6.1g / 5 ms, 3.7g / 10 ms
shock resistance with sine pulse	
• at DC	9.6g / 5 ms, 5.8g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	1.21 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %

relative humidity at 55 °C according to IEC 60068-2-30	95 %
maximum	
Environmental footprint	
Environmental Product Declaration(EPD)	Yes
Global Warming Potential [CO2 eq] total	107 kg
Global Warming Potential [CO2 eq] during manufacturing	5.88 kg
Global Warming Potential [CO2 eq] during operation	102 kg
Global Warming Potential [CO2 eq] after end of life	-0.988 kg
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	690 V
 at AC-3e rated value maximum 	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated	70 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	70 A
 up to 690 V at ambient temperature 60 °C rated value at AC-3 	60 A
at AC-3 — at 400 V rated value	51 A
— at 500 V rated value — at 500 V rated value	51 A
— at 690 V rated value ● at AC-3e	24 A
	E4.A
— at 400 V rated value	51 A
— at 500 V rated value	51 A
— at 690 V rated value	24 A
• at AC-4 at 400 V rated value	41 A
• at AC-5a up to 690 V rated value	61.6 A
 at AC-5b up to 400 V rated value at AC-6a 	41.5 A
	43.2 A
— up to 230 V for current peak value n=20 rated value	
— up to 400 V for current peak value n=20 rated value	43.2 A
— up to 500 V for current peak value n=20 rated value	43.2 A
— up to 690 V for current peak value n=20 rated valueat AC-6a	24 A
— up to 230 V for current peak value n=30 rated value	28.8 A
 up to 400 V for current peak value n=30 rated value 	28.8 A
— up to 500 V for current peak value n=30 rated value	28.8 A
— up to 690 V for current peak value n=30 rated value	24 A
minimum cross-section in main circuit at maximum AC-1 rated value	25 mm²
operational current for approx. 200000 operating cycles at AC-4	24.4
at 400 V rated value at 600 V rated value	24 A
at 690 V rated value	20 A
operational current	
at 1 current path at DC-1 at 24 V reted value.	55 A
— at 24 V rated value	55 A
— at 60 V rated value	23 A
— at 110 V rated value	4.5 A 1 A
— at 220 V rated value	
— at 440 V rated value	0.4 A
— at 600 V rated value	0.25 A
with 2 current paths in series at DC-1 ct 24 V reted value.	EE A
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A

— at 440 V rated value	1 A
— at 600 V rated value	0.8 A
with 3 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
at 1 current path at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 60 V rated value	6 A
— at 220 V rated value	1 A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
operating power	
• at AC-2 at 400 V rated value	22 kW
• at AC-3	
— at 230 V rated value	15 kW
— at 400 V rated value	22 kW
— at 500 V rated value	30 kW
— at 690 V rated value	22 kW
• at AC-3e	
— at 230 V rated value	15 kW
— at 400 V rated value	22 kW
— at 500 V rated value	30 kW
— at 690 V rated value	22 kW
operating power for approx. 200000 operating cycles at AC-	
at 400 V rated value	12.6 kW
at 400 V rated value at 690 V rated value	18.2 kW
operating apparent power at AC-6a	10.2 ((1)
up to 230 V for current peak value n=20 rated value	17.2 kVA
up to 400 V for current peak value n=20 rated value up to 400 V for current peak value n=20 rated value	29.9 kVA
up to 500 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value	37.4 kVA
up to 690 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value	28.6 kVA
operating apparent power at AC-6a	20.0 (1.7)
up to 230 V for current peak value n=30 rated value	11.4 kVA
up to 400 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value	19.9 kVA
up to 500 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value	24.9 kVA
up to 690 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value	28.6 kVA
short-time withstand current in cold operating state up to	
40 °C	007 A. Han minimum ann an i'
limited to 1 s switching at zero current maximum	937 A; Use minimum cross-section acc. to AC-1 rated value
limited to 5 s switching at zero current maximum	697 A; Use minimum cross-section acc. to AC-1 rated value
limited to 10 s switching at zero current maximum	468 A; Use minimum cross-section acc. to AC-1 rated value
limited to 30 s switching at zero current maximum	282 A; Use minimum cross-section acc. to AC-1 rated value

 limited to 60 s switching at zero current maximum 	229 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at DC	1 500 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	600 1/h
• at AC-3 maximum	800 1/h
	800 1/h
at AC-3e maximum	
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
full-scale value	1.2
design of the surge suppressor	with varistor
inrush current peak	2.6 A
duration of inrush current peak	50 μs
locked-rotor current mean value	0.9 A
locked-rotor current peak	2.1 A
duration of locked-rotor current	230 ms
holding current mean value	40 mA
closing power of magnet coil at DC	21.5 W
	1 W
holding power of magnet coil at DC	1 W
closing delay	
• at DC	35 80 ms
opening delay	
• at DC	30 55 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	on the front, non-detectable
Auxiliary circuit design of the auxiliary switch	on the front, non-detachable
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact	2
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact	2
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	2
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact	2
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	2
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	2 2 10 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value	2 2 10 A 6 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value	2 2 10 A 6 A 3 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value	2 2 10 A 6 A 3 A 2 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	2 2 10 A 6 A 3 A 2 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12	2 2 10 A 6 A 3 A 2 A 1 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value	2 2 10 A 6 A 3 A 2 A 1 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value	2 10 A 6 A 3 A 2 A 1 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 110 V rated value • at 110 V rated value • at 125 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 3 A 2 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	2 2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value	2 2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value	2 2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 24 V rated value	2 2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 48 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 148 V rated value • at 148 V rated value • at 150 V rated value • at 110 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 100 V rated value • at 110 V rated value • at 125 V rated value	2 2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 110 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 26 V rated value • at 125 V rated value • at 120 V rated value	2 2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
Auxiliary circuit design of the auxiliary switch number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 24 V rated value • at 24 V rated value • at 25 V rated value	2 2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7

full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	52 A
at 600 V rated value	52 A
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	3 hp
— at 230 V rated value	10 hp
• for 3-phase AC motor	
— at 200/208 V rated value	15 hp
— at 220/230 V rated value	15 hp
— at 460/480 V rated value	40 hp
— at 575/600 V rated value	50 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the main circuit 	
 — with type of coordination 1 required 	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)
 — with type of assignment 2 required 	gG: 80A (690V,100kA), aM: 50A (690V,100kA), BS88: 63A (415V,80kA)
for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	114 mm
width	55 mm
depth	178 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control circuit 	spring-loaded terminals
 at contactor for auxiliary contacts 	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections	
for main contacts	
— solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
 finely stranded with core end processing 	2x (1 25 mm²), 1x (1 35 mm²)
for AWG cables for main contacts	2x (18 2), 1x (18 1)
connectable conductor cross-section for main contacts	
finely stranded with core end processing	1 35 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm ²
 finely stranded with core end processing 	0.5 1.5 mm²
finely stranded without core end processing	0.5 2.5 mm ²
type of connectable conductor cross-sections	

• for auxiliary contacts - solid or stranded 2x (0.5 ... 2.5 mm²) - finely stranded with core end processing 2x (0.5 ... 1.5 mm²) - finely stranded without core end processing 2x (0.5 ... 2.5 mm²) • for AWG cables for auxiliary contacts 2x (20 ... 14) AWG number as coded connectable conductor cross section • for main contacts 18 1 · for auxiliary contacts 20 ... 14 product function • mirror contact according to IEC 60947-4-1 Yes • positively driven operation according to IEC 60947-5-1 No • suitable for safety function Yes suitability for use safety-related switching OFF Yes service life maximum 20 a test wear-related service life necessary Yes proportion of dangerous failures • with low demand rate according to SN 31920 40 % • with high demand rate according to SN 31920 73 % B10 value with high demand rate according to SN 31920 1 000 000 failure rate [FIT] with low demand rate according to SN 100 FIT 31920 ISO 13849 device type according to ISO 13849-1 3 overdimensioning according to ISO 13849-2 necessary Yes IEC 61508 safety device type according to IEC 61508-2 Type A **Electrical Safety** protection class IP on the front according to IEC 60529 IP20 touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front **Approvals Certificates General Product Approval**







Confirmation



<u>KC</u>

General Product Approval

EMV

Functional Saftey

Test Certificates

Marine / Shipping





Type Examination Certificate

Special Test Certificate Type Test Certificates/Test Report



Marine / Shipping











Confirmation

Railway

Environment

Special Test Certificate



Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2036-3KB44-3MA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2036-3KB44-3MA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-3KB44


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2036-3KB44-3MA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-3KB44-3MA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2036-3KB44-3MA0&objecttype=14&gridview=view1







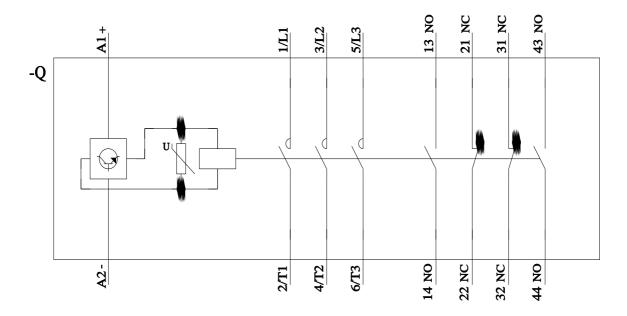

last modified: