Baumer
Passion for Sensors

Diffuse sensors with background suppression

O200.GP-NV1T.72CV/E022_H006

Diffuse sensors with background suppression - miniature

Article number: 11230693

Overview

- Outstanding reliability and unrivalled immunity against ambient light
- Baumer PinPoint LED: Small, homogeneous light spot with sharp edges
- Line beam for complete detection of irregular, perforated objects
- qTeach - tamper-proof, simple teach-in with ferromagnetic tool
- Quick mounting by means of M3 threaded bushes made of stainless steel

Picture similar

Technical data

General data	
Type	Background suppression
Version	Line beam
Sensing distance Tw	20 … 120 mm
Sensing range Tb	3 … 132 mm
Smallest object recognizable typ.	8 mm at 60 mm
Power on indication	LED green
Alignment / soiled lens indicator	Flashing output indicator
Output indicator	LED yellow
Sensing distance adjustment	qTeach
Suppression of reciprocal influence	Yes
Beam type	Line
Alignment optical axis	< 1,5°
Light Source	
Light source	Pulsed PinPoint LED
Wave length	644 nm
Electrical data	
Response time / release time	≤ 2 ms
Jitter	≤ 2 ms

Electrical data	
Voltage supply range +Vs	10 … 30 VDC
Current consumption max. (no load)	40 mA (@ 10 VDC)
Current consumption typ.	16 mA (@ 24 VDC)
Voltage drop Vd	<2 VDC
Output function	Light / dark operate
Output circuit	NPN complementary
Output current	50 mA
Short circuit protection	Yes
Reverse polarity protection	Yes
Mechanical data	
Width / diameter	8 mm
Height / length	25.1 mm
Depth	15.8 mm
Design	Rectangular
Mechanical mounting	Threaded sleeves M3 (stainless steel)
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Cable 4 pin, 2 m
Cable characteristics	PVC / PVC 4 x 0.08 mm²
Ambient conditions	
Protection class	IP 67
Operating temperature	-25 … +50 °C

2024-02-16 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

O200.GP-NV1T.72CV/E022_H006

Diffuse sensors with background suppression - miniature

Article number: 11230693

Dimension drawing

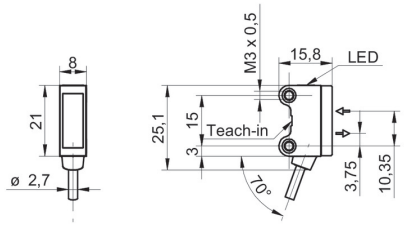

Hysteresis curve

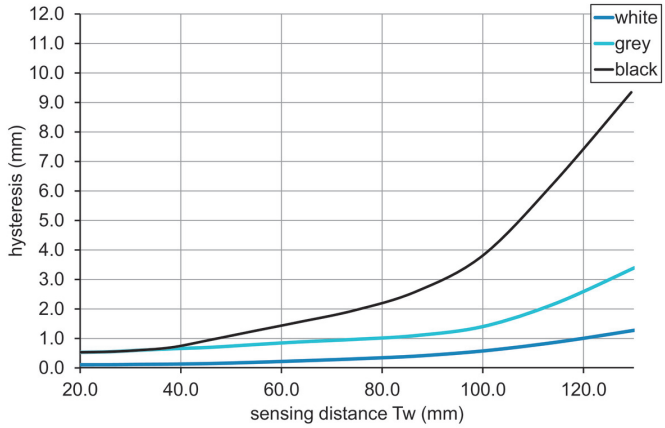

Connection diagram

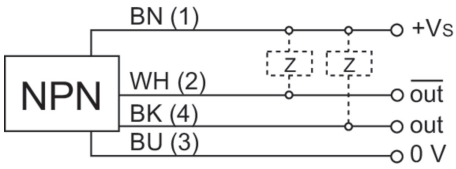

Beam characteristic (typically)

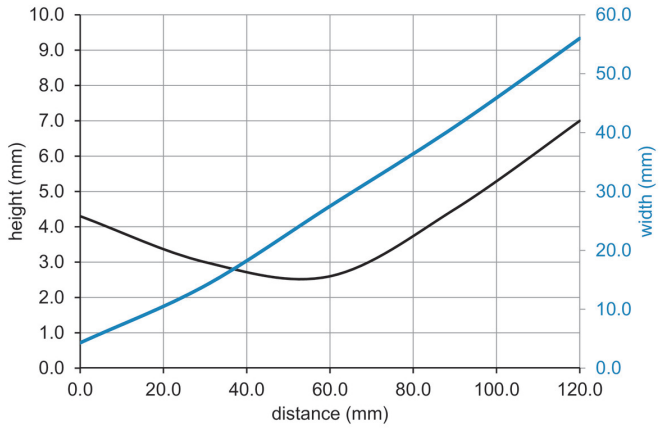

Sensing distance diagram

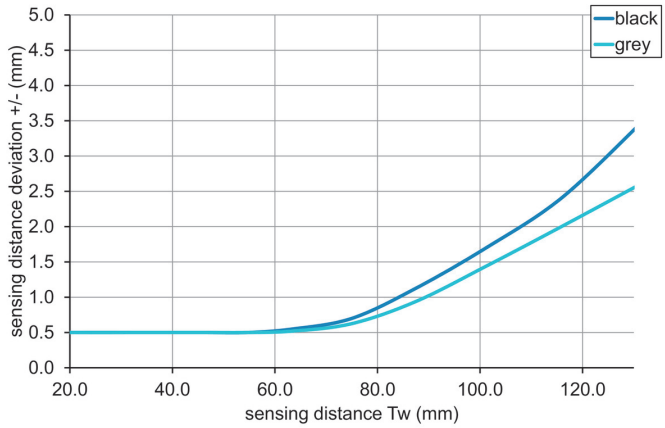

2024-02-16 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.