

**Overview**

- light barrier
- 30 ... 250 mm
- pulsed red laser diode
- NPN complementary
- qTeach
- connector M8 4 pin
- -10 ... 60 °C
- IP 67



Picture similar



**Technical data**

**General data**

Type	Light barrier
Version	Standard object detection
Light source	Pulsed red laser diode
Background position Sde	30 ... 250 mm
Scanning range Sa	90% ... 85% Sde
Repeat accuracy	< 0,1 mm at 100 mm
Power on indication	LED green
Light indicator	LED yellow
Sensing distance adjustment	qTeach
Laser class	1
Distance to focus	400 mm
Wave length	656 nm
Suppression of reciprocal influence	Yes
Alignment optical axis	< 2°

**Electrical data**

Response time / release time	< 0,25 ms
Voltage supply range +Vs	11 ... 30 VDC

**Electrical data**

Current consumption max. (no load)	30 mA
Current consumption typ.	25 mA
Voltage drop Vd	< 2,5 VDC
Output function	Light / dark operate
Output circuit	NPN complementary
Output current	< 100 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

**Mechanical data**

Width / diameter	12,9 mm
Height / length	32,3 mm
Depth	23 mm
Type	Rectangular
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Connector M8 4 pin

**Ambient conditions**

Operating temperature	-10 ... +60 °C
Protection class	IP 67

**Remarks**


- qTeach

# O300.SL-NV1T.72N


SmartReflect Light barriers - miniature

Article number: 11179004


## Dimension drawing

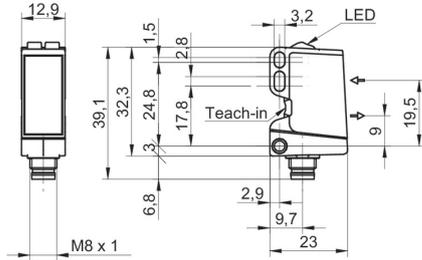

## Beam characteristic (typically)

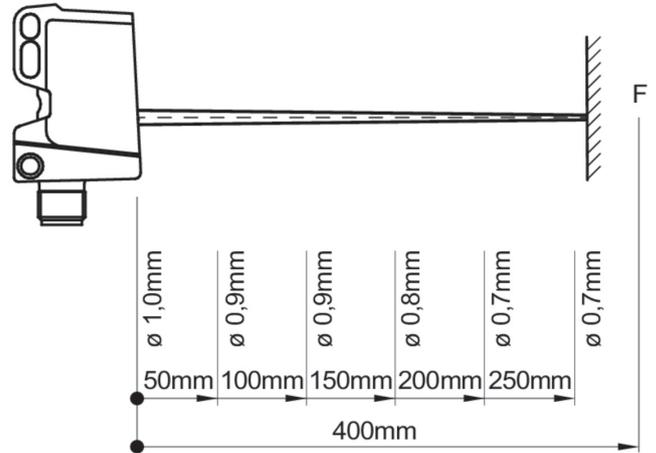

## Connection diagram

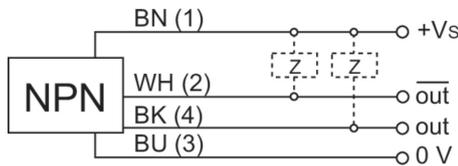

## Laser warning

**CLASS 1 LASER  
PRODUCT**

IEC 60825-1/2014  
Complies with 21 CFR 1040.10 and  
1040.11 except for conformance with  
IEC 60825-1 Ed. 3., as described in  
Laser Notice No. 56, dated May 8, 2019

## Pin assignment

