

Overview

- emitter
- through beam sensor
- 10 m
- pulsed infrared LED
- cable 4 pin, 2 m
- -25 ... 60 °C
- IP 67



Picture similar



Technical data

General data

Type	Through beam sensor
Emitter / receiver	Emitter
Light source	Pulsed infrared diode
Actual range Sb	10 m
Nominal range Sn	15 m
Power on indication	LED green
Wave length	850 nm
Alignment optical axis	< 2°

Electrical data

Voltage supply range +Vs	10 ... 30 VDC
Current consumption max. (no load)	40 mA
Current consumption typ.	30 mA

Electrical data

Reverse polarity protection	Yes
-----------------------------	-----

Mechanical data

Width / diameter	12.9 mm
Height / length	32.3 mm
Depth	23 mm
Design	Rectangular
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Cable 4 pin, 2 m

Ambient conditions


Operating temperature	-25 ... +60 °C
Protection class	IP 67

O300.TI-ZZZZ.72CU


Through beam sensors - miniature

Article number: 11209575


Technical drawings

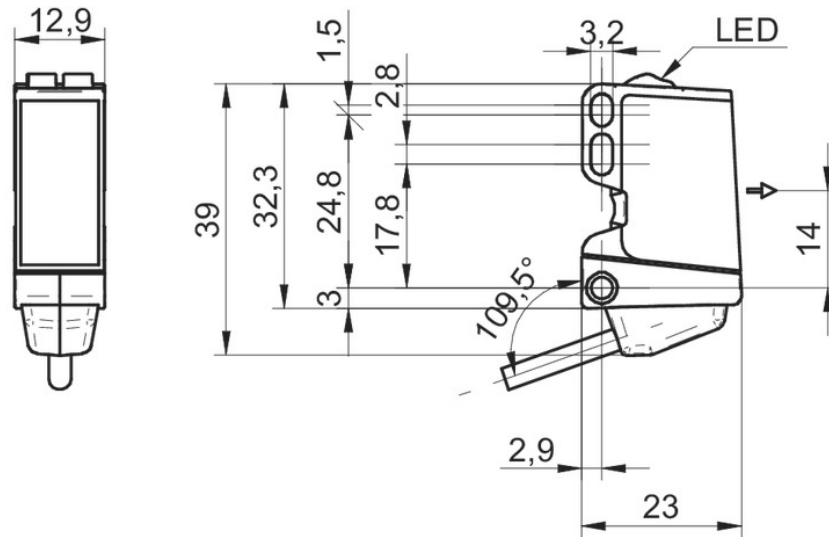

Connection diagram

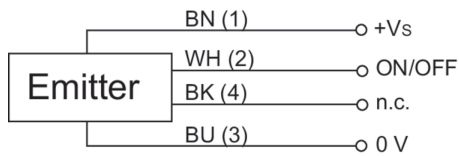

Beam characteristic (typically)

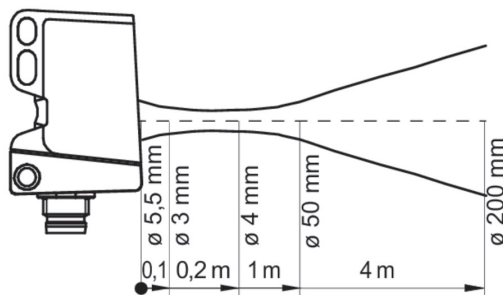

Excess gain curve

