

IFRM 18P17M1/PL

Inductive proximity switch - outdoor

Article number: 11013677

Overview

- 10mm for flush mount in St37
- PNP make function (NO)
- cable PUR 3 x 0,25, 2 m
- -40 ... 80 °C
- IP 67



Picture similar



Technical data

General data		Electrical data	
Mounting type	Flush	Short circuit protection	Yes
Special type	Outdoor design	Reverse polarity protection	Yes
Nominal sensing distance S _n	10 mm	Mechanical data	
Hysteresis	2 ... 15 % of S _r	Type	Cylindrical threaded
Output indicator	LED red	Material (sensing face)	PBT
Electrical data		Housing material	Brass nickel plated
Switching frequency	400 Hz	Dimension	18 mm
Voltage supply range +V _s	6 ... 36 VDC	Housing length	50 mm
Current consumption max. (no load)	24 mA	Connection types	Cable PUR 3 x 0,25, 2 m
Output circuit	PNP make function (NO)	Tightening torque max.	40 Nm (Front: 28 Nm)
Voltage drop V _d	< 2 VDC	Ambient conditions	
Output current	< 200 mA	Operating temperature	-40 ... +80 °C
		Protection class	IP 67

Remarks


- Load resistance: Z < 100 kOhm must be connected

IFRM 18P17M1/PL

Inductive proximity switch - outdoor

Article number: 11013677

Dimension drawing

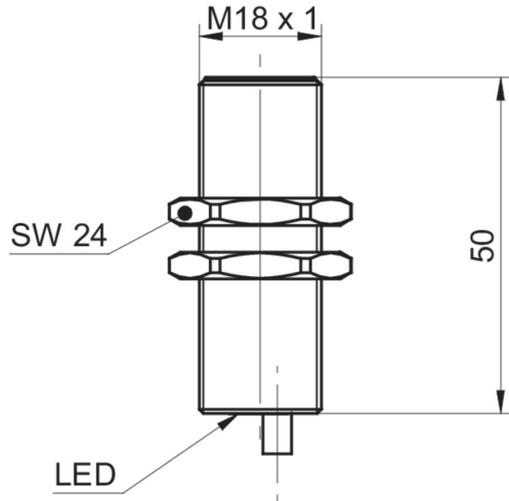

Connection diagram

