

FAPY 50

LongLife DC tachgenerator with foot mount and 5/16" solid shaft with flat, terminal box with 1/2" -14 NPT cable entry

Article number: 11055497

Overview

- Low response time
- Open circuit voltage 50 V per 1000 rpm
- Calibration tolerance $\pm 1\%$
- Housing foot B3
- Very high resistance to shock
- High signal quality due to patented LongLife technology
- Recognition of sense of rotation possible via control
- CSA / C / US approved



HUBNER
BERLIN
A Baumer Brand

Technical data

Technical data - electrical ratings

Reversal tolerance	$\leq 0.1\%$
Linearity tolerance	$\leq 0.15\%$
Temperature coefficient	$\pm 0.05\%/K$ (open-circuit)
Isolation class	B
Calibration tolerance	$\pm 1\%$
Climatic test	Humid heat, constant (IEC 60068-2-3, Ca)
Armature-circuit time-constant	$< 75\ \mu s$
Open-circuit voltage	50 V per 1000 rpm
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	CE, CSA C/US

Technical data - mechanical design

Size (flange)	3.88"
Shaft type	$\varnothing 5/16"$, solid shaft with flat

Technical data - mechanical design

Flange	Housing foot B3
Protection EN 60529	IP 55
Operating speed	$\leq 10000\text{ rpm}$
Torque	1.5 Ncm
Rotor moment of inertia	1.1 kgcm ²
Admitted shaft load	$\leq 60\text{ N}$ axial $\leq 80\text{ N}$ radial
Material	Housing: aluminium die-cast Shaft: stainless steel
Operating temperature	$-22...+266\text{ }^{\circ}\text{F}$
Resistance	IEC 60068-2-6 Vibration 10 g, 10-2000 Hz IEC 60068-2-27 Shock 300 g, 1 ms
Weight approx.	2.6 kg
Connection	Terminal box with 1/2" -14 NPT cable entry


FAPY 50

LongLife DC tachgenerator with foot mount and 5/16" solid shaft with flat, terminal box with 1/2" -14 NPT cable entry


Article number: 11055497

Terminal assignment

Polarity for positive rotating direction



Dimensions

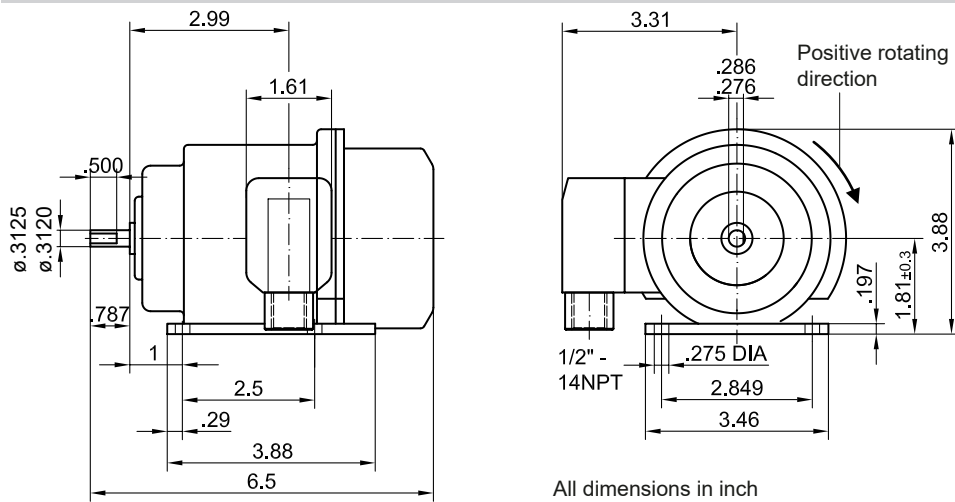

FAPY 50

LongLife DC tachgenerator with foot mount and 5/16" solid shaft with flat, terminal box with 1/2" -14 NPT cable entry


Article number: 11055497

Data according to type

Type	Off-load voltage	Minimum load required depending on speed range [rpm]			Armature resistance	Armature inductance
	U_0 [mV/rpm]	0-3000 R_L [kΩ]	0-6000 R_L [kΩ]	0- n_{max} R_L [kΩ]	R_A (68°F) [Ω]	L_A [mH]
FAPY 50	50	≥1.9	≥7.8	≥21.5	66	137

Superimposed ripple (for $\tau_{RC} = 0.7$ ms): ≤0.5% (peak-peak) ≤0.2% (rms)

Equivalent circuit diagram

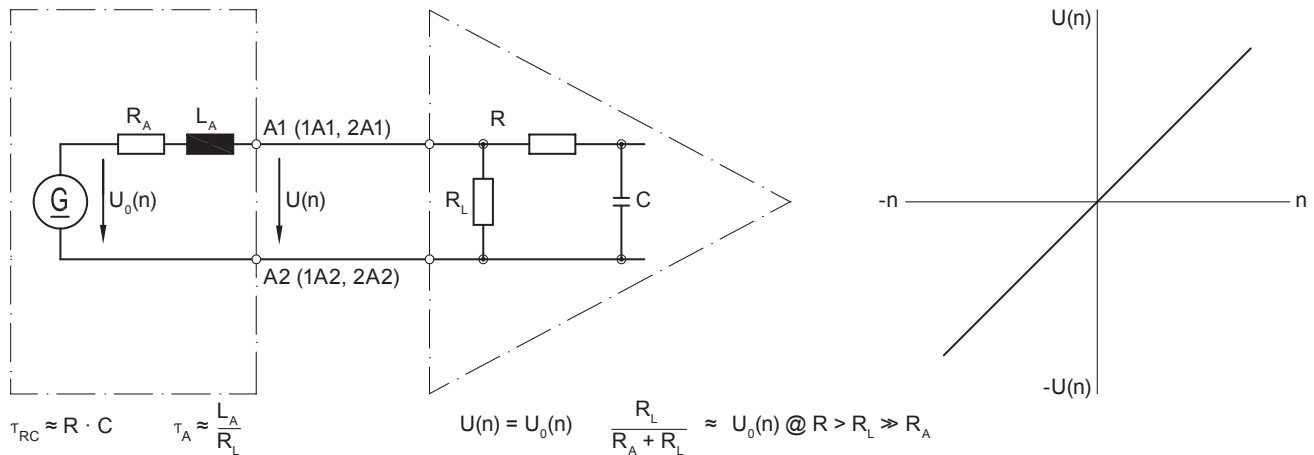

Accessories

Mounting accessories

Spring disk coupling K35 (shaft ø6...12 mm)