

TDP0,2 LS-4 KM194860

Solid shaft with housing foot B3 and own bearings

Article number: 11167462

Overview

- Open circuit voltage 60 mV per rpm
- Housing foot B3
- LongLife commutator thanks to silver track with constantly low contact resistance for high signal quality
- Specially adapted brushes for maintenance-free operation and long service life
- Wide adjustable speed range
- Low response time
- Very high resistance to shock



HUBNER
BERLIN
A Baumer Brand

Technical data

Technical data - electrical ratings

Reversal tolerance	≤0.1 %
Linearity tolerance	≤0.15 %
Temperature coefficient	± 0.05 %/K (open-circuit)
Isolation class	B
Calibration tolerance	±1 %
Climatic test	Humid heat, constant (IEC 60068-2-3, Ca)
Performance	12 W (speed ≥3000 rpm)
Armature-circuit time-constant	<75 µs
Open-circuit voltage	60 mV per rpm
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	CE CSA

Technical data - mechanical design

Size (flange)	ø86.5 mm
Shaft type	ø7 mm solid shaft (with key)
Protection EN 60529	IP 55
Operating speed	≤10000 rpm
Torque	1.5 Ncm
Rotor moment of inertia	1.1 kgcm ²
Admitted shaft load	≤60 N axial ≤80 N radial
Material	Housing: aluminium die-cast Shaft: stainless steel
Operating temperature	-30...+130 °C
Resistance	IEC 60068-2-6 Vibration 10 g, 10-2000 Hz IEC 60068-2-27 Shock 300 g, 1 ms
Weight approx.	2.7 kg
Connection	Cable 1 m

TDP0,2 LS-4 KM194860

Solid shaft with housing foot B3 and own bearings


Article number: 11167462

Terminal assignment

View A (see dimension)

Connecting terminal tachogenerator TDP

Polarity for positive rotating direction

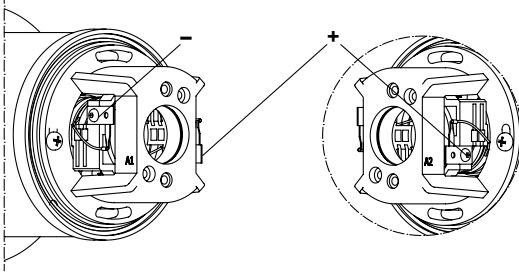


TDP0,2 LS-4 KM194860

Solid shaft with housing foot B3 and own bearings

Article number: 11167462

Dimensions

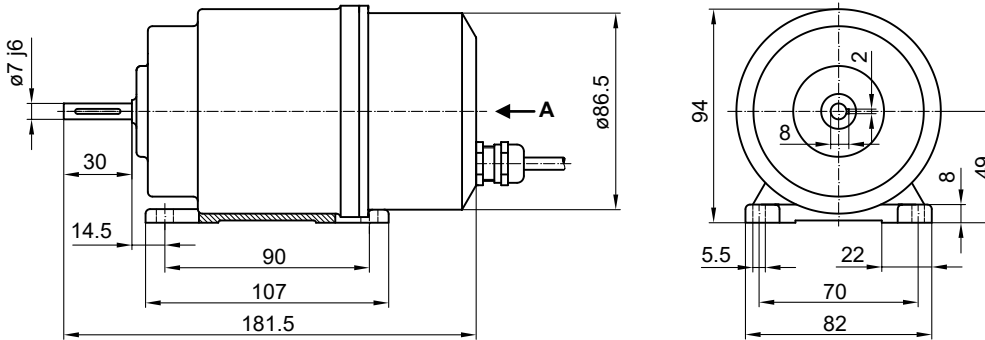

TDP0,2 LS-4 KM194860

Solid shaft with housing foot B3 and own bearings


Article number: 11167462

Data according to type

Type	Open-circuit voltage	Minimum load required depending on speed range [rpm]			Maximum operating speed	Armature resistance	Armature inductance
	U_0 [mV/rpm]	0-3000 R_L [k Ω]	0-6000 R_L [k Ω]	0- n_{max} R_L [k Ω]	n_{max} [rpm]	R_A (20°C) [Ω]	L_A [mH]
TDP0,2 LS-4	60	≥ 2.7	≥ 11	≥ 30	10000	99	200
Superimposed ripple (for $\tau_{RC} = 0.7$ ms):		$\leq 0.5\%$ (peak-peak)		$\leq 0.2\%$ (rms)			

Equivalent circuit diagram

Tachogenerator

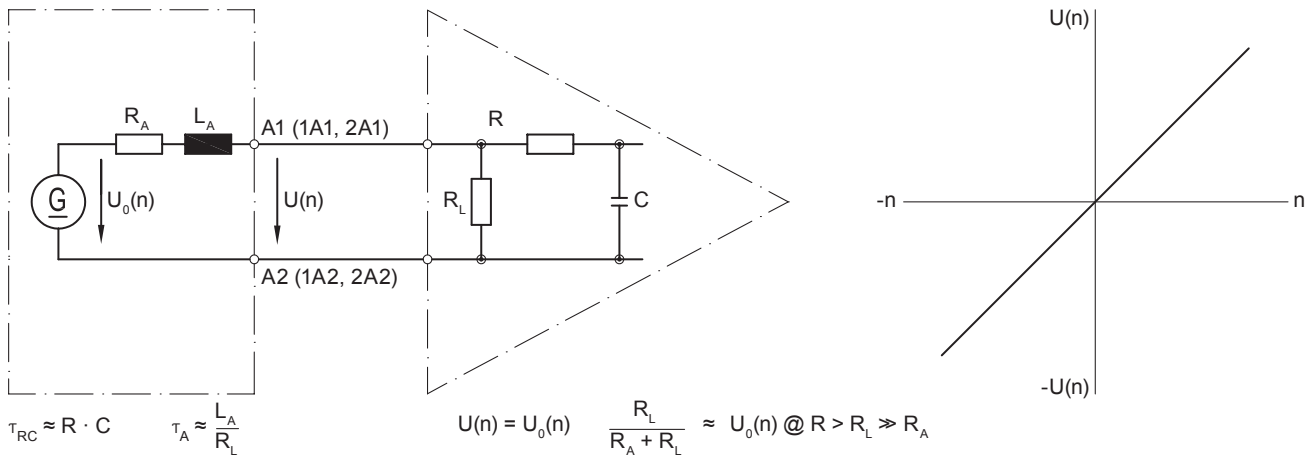

Polarity for positive rotating direction (see dimension) / A1 (1A1, 2A1): + (VDE) / A2 (1A2, 2A2): - (VDE)

Accessories

Mounting accessories

- Spring disk coupling K 35 (shaft $\varnothing 6 \dots 12$ mm)
- Spring disk coupling K 50 (shaft $\varnothing 11 \dots 16$ mm)
- Spring disk coupling K 60 (shaft $\varnothing 11 \dots 22$ mm)