

TDP0,2E LT-4 B10 55 EG

Solid shaft with EURO flange B10, with own bearings

Article number: 11136890

Overview

- Essential version of TDP 0.2 with standard copper collector
- Low response time
- Open circuit voltage 60 mV per rpm
- EURO flange B10
- Very high resistance to shock
- Recognition of sense of rotation possible via control



Picture similar



HUBNER
BERLIN
A Baumer Brand

Technical data

Technical data - electrical ratings

Reversal tolerance	≤0.1 %
Linearity tolerance	≤0.15 %
Temperature coefficient	± 0.05 %/K (open-circuit)
Isolation class	B
Calibration tolerance	±1 %
Climatic test	Humid heat, constant (IEC 60068-2-3, Ca)
Performance	12 W (speed ≥3000 rpm)
Armature-circuit time-constant	<75 µs
Open-circuit voltage	60 mV per rpm
Interference immunity	EN 61000-6-2
Emitted interference	EN 61000-6-3
Approval	CE

Technical data - mechanical design

Size (flange)	ø115 mm
---------------	---------

Technical data - mechanical design

Shaft type	ø11 mm solid shaft (with key)
Flange	EURO flange B10
Protection EN 60529	IP 55
Operating speed	≤10000 rpm
Torque	1.5 Ncm
Rotor moment of inertia	1.1 kgcm ²
Admitted shaft load	≤60 N axial ≤80 N radial
Material	Housing: aluminium die-cast Shaft: stainless steel
Operating temperature	-30...+130 °C
Resistance	IEC 60068-2-6 Vibration 10 g, 10-2000 Hz IEC 60068-2-27 Shock 300 g, 1 ms
Weight approx.	2.4 kg
Connection	Terminal box

Optional

- Powder-coated housing

TDP0,2E LT-4 B10 55 EG

Solid shaft with EURO flange B10, with own bearings


Article number: 11136890

Terminal assignment

View A (see dimension)

Connecting terminal tachogenerator TDP

Polarity for positive rotating direction




TDP0,2E LT-4 B10 55 EG

Solid shaft with EURO flange B10, with own bearings

Article number: 11136890

Dimensions

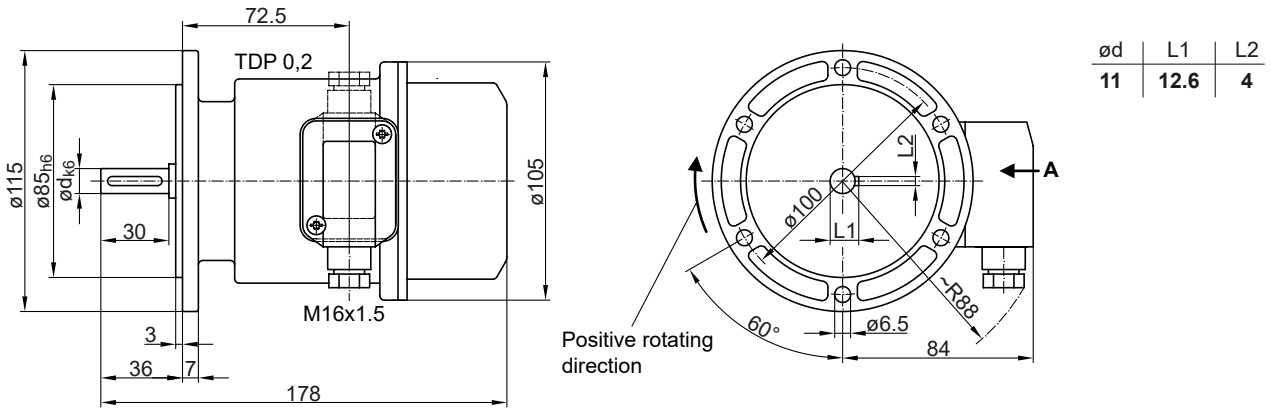

TDP0,2E LT-4 B10 55 EG

Solid shaft with EURO flange B10, with own bearings

Article number: 11136890


Data according to type

Type	Open-circuit voltage	Minimum load required depending on speed range [rpm]			Maximum operating speed	Armature resistance	Armature inductance
	U_0 [mV/rpm]	0-3000 R_L [kΩ]	0-6000 R_L [kΩ]	0- n_{max} R_L [kΩ]	n_{max} [rpm]	R_A (20°C) [Ω]	L_A [mH]
TDP0,2E LT-4	60	≥2.7	≥11	≥30	10000	99	200

Superimposed ripple (for $\tau_{RC} = 0.7$ ms): ≤0.5% (peak-peak) ≤0.2% (rms)

Equivalent circuit diagram

Tachogenerator

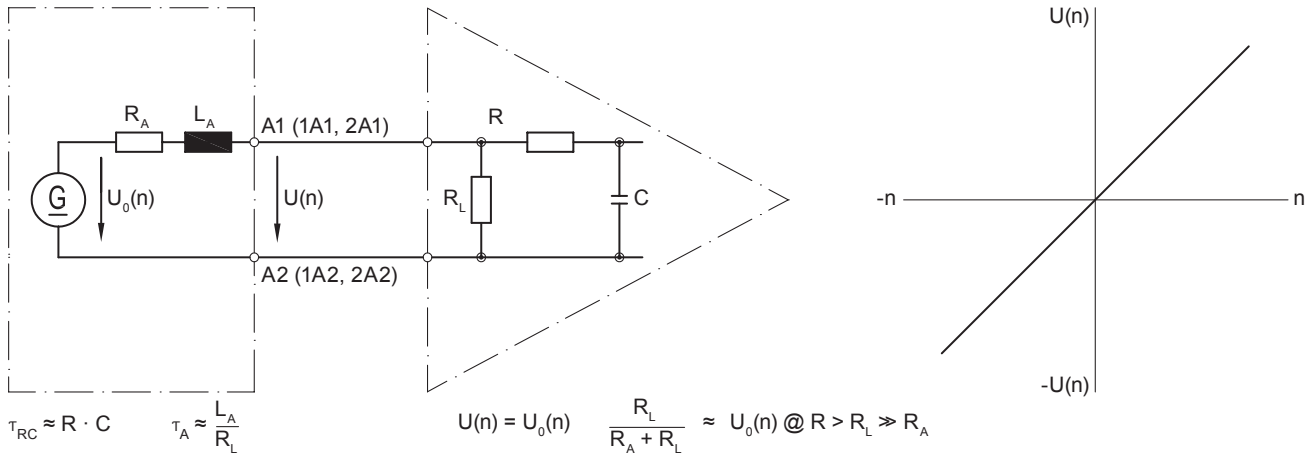

Polarity for positive rotating direction (see dimension) / A1 (1A1, 2A1): + (VDE) / A2 (1A2, 2A2): - (VDE)

Accessories

Mounting accessories

- Spring disk coupling K 35 (shaft ø6...12 mm)
- Spring disk coupling K 50 (shaft ø11...16 mm)
- Spring disk coupling K 60 (shaft ø11...22 mm)