


CX2043 | Embedded PC with AMD Ryzen™ V1807B

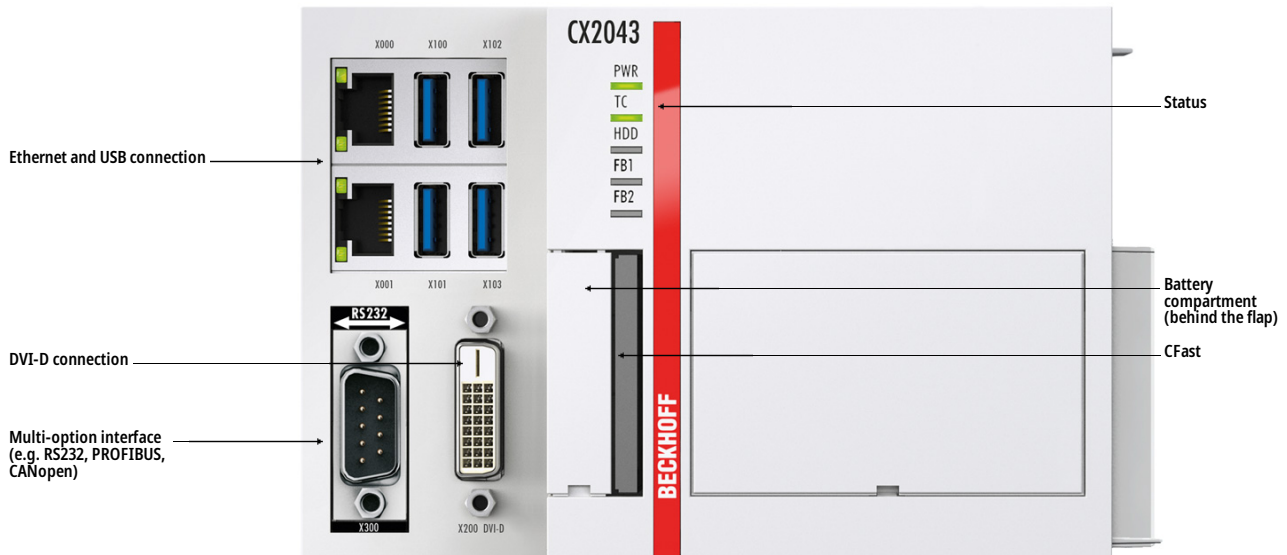

i Product status: regular delivery

The CX2043 is a modularly expandable Embedded PC for DIN rail mounting and has an AMD Ryzen™ V1807B CPU with a clock speed of 3.35 GHz and four cores. The power supply unit required for operation enables the direct use and connection of all Beckhoff I/O components to this CPU module.

The TwinCAT automation software turns the CX2043 system into a high-performance PLC and motion control system that can be used with or without visualization. Both TwinCAT 2 in 32-bit mode and the latest TwinCAT 3 version in 64-bit mode are supported. Continuing support for TwinCAT 2 by the CX2033 and CX2043 guarantees investment protection for projects and systems that were or will be created with this 32-bit generation.

The devices from the CX20x3 series are characterized by outstanding real-time characteristics under the highest computing loads. This enables deterministic processing with short cycle times on the individual cores of the CPUs.

The basic equipment of the hardware includes two independent Gbit-Ethernet interfaces, four USB 3.2 Gen. 2 ports, one DVI-D interface and a multi-option interface that can be equipped ex factory with a flexible choice of further interfaces (e.g., serial port, fieldbus, or second video connection).

The internal RAM size is 8 GB; up to 32 GB are also optionally possible. The controller boots from the CFast card and has an internal 128 kB NOVRAM for use as a persistent data memory.

The CX2043 is cooled by a high-quality speed-monitored and speed-controlled fan. The fan cartridge features wireless contacting and is easy to replace.

Other components from the CX2000 family can be connected via the multi-pin terminals on either side. Up to four modules of the type CX2500-xxxx can be connected on the left side of the basic CPU module. The connection order is irrelevant. Internally, the modules are connected via PCI Express® and can be plugged to the CPU in the field.

Modules of the type CX2550 (e.g., hard disks/SSD modules) and a power supply unit of the type CX2100-xxxx can be connected on the right. The power supply unit supplies power to the entire system of CPU module and all plugged optional

components. All Beckhoff EL and KL terminals can be connected directly to the power supply unit. A compact unit comprising controller and I/O level is thus created on the DIN rail.

The extended operating temperature range from -25°C to +60°C enables the CX2043 to be used under climatically challenging conditions.

Product information

Technical data

Technical data	CX2043
Processor	AMD Ryzen™ V1807B 3.35 GHz
Number of cores	4
Flash memory	slot for CFast card, card not included
Main memory	8 GB DDR4 RAM (expandable ex factory to 32 GB)
Interfaces	2 x RJ45 10/100/1000 Mbit/s, 1 x DVI-D, 4 x USB 3.2 Gen. 2, 1 x optional interface
Cooling	integrated fan with ball bearings and speed monitoring
Diagnostics LED	1 x power, 1 x TC status, 1 x flash access, 2 x bus status
Clock	internal battery-backed clock for time and date (battery exchangeable)
Operating system	Windows 10 IoT Enterprise 2019 LTSC, Windows 10 IoT Enterprise 2021 LTSC, Windows 11 IoT Enterprise 2024 LTSC, TwinCAT/BSD
Control software	TwinCAT 2 runtime TwinCAT 3 runtime (XAR)
I/O connection	via power supply module (E-bus or K-bus, automatic recognition)
Power supply	24 V DC (-15%/+20%)
NOVRAM	128 kB
Max. power consumption	70 W
Weight	approx. 1230 g
Dimensions (W x H x D)	144 mm x 99 mm x 91 mm
Relative humidity	95%, no condensation
Operating temperature	-25...+60°C
Storage temperature	-40...+85°C
Vibration/shock resistance	conforms to EN 60068-2-6/EN 60068-2-27
EMC immunity/emission	conforms to EN 61000-6-2/EN 61000-6-4
Protection rating	IP20
Approvals/markings	CE, UL
TwinCAT 3 platform level	Mid Performance (60); please see here for an overview of all the TwinCAT 3 platform level

Ordering information

S = operating system options

- 0 = no operating system
- 2 = Windows 11 IoT Enterprise 2024 LTSC 64 Bit
- 6 = Windows 10 IoT Enterprise 2019 LTSC 32 bit
- 7 = Windows 10 IoT Enterprise 2019 LTSC 64 bit
- 8 = TwinCAT/BSD
- 9 = Windows 10 IoT Enterprise 2021 LTSC 64 bit

T = TwinCAT software licenses

- 0 = no TwinCAT
- 1 = equipped with TwinCAT 2 PLC runtime
- 2 = equipped with TwinCAT 2 NC PTP runtime
- 3 = equipped with TwinCAT 2 NC I runtime
- 5 = equipped with TwinCAT 3 runtime (XAR), no licenses included

CX20x3-0xST

Ordering information	
CX2043-0100	CPU module, no operating system, no TwinCAT
CX2043-0160	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, no TwinCAT
CX2043-0161	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, TwinCAT 2 PLC runtime
CX2043-0162	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, TwinCAT 2 NC PTP runtime
CX2043-0163	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 32 bit, TwinCAT 2 NC I runtime
CX2043-0170	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 64 bit, no TwinCAT
CX2043-0175	CPU module, Microsoft Windows 10 IoT Enterprise 2019 LTSC, 64 bit, TwinCAT 3 runtime (XAR), no licenses included
CX2043-0185	CPU module, TwinCAT/BSD, TwinCAT 3 runtime (XAR), no licenses included
CX2043-0190	CPU module, Microsoft Windows 10 IoT Enterprise 2021 LTSC, 64 bit, no TwinCAT
CX2043-0195	CPU module, Microsoft Windows 10 IoT Enterprise 2021 LTSC, 64 bit, TwinCAT 3 runtime (XAR), no licenses included
CX2043-0220	CPU module, Microsoft Windows 11 IoT Enterprise 2024 LTSC, 64 bit, no TwinCAT
CX2043-0225	CPU module, Microsoft Windows 11 IoT Enterprise 2024 LTSC, 64 bit, TwinCAT 3 runtime (XAR), no licenses included

CX20x3-016x: only 4 GB RAM can be used with Windows 10 IoT Enterprise 2019 LTSC 32 Bit

TwinCAT/BSD requires a CFast flash card with a minimum capacity of 20 GB

Windows 10 IoT Enterprise requires a CFast flash card with a minimum capacity of 40 GB.

TwinCAT 3 runtime (XAR) is preinstalled, without licenses. Please order TwinCAT 3 licenses separately from the TwinCAT 3 Price List.

Options

Options	
<u>CX2900-0010</u>	Operating system preequipped on 2½-inch HDD/SSD for CX20x2 and CX20x3. Requires the extension module CX2550-0020 and one 2½-inch HDD/SSD.

[CX2900-0305](#)

Memory extension to 16 GB DDR4 RAM, instead of 8 GB DDR4 RAM for CX2033 and CX2043. For the CX2033 this extension reduces the maximum permissible ambient temperature to 50°C. For operation of the CX2033 up to 60°C the active cooling CX2900-0301 is required.

[CX2900-0306](#)

Memory extension to 32 GB DDR4 RAM, instead of 8 GB DDR4 RAM for CX2043

Optional interfaces[CX2043-N010](#)

DVI-D interface, additional DVI-D port for clone or extended display mode. Is not supported by TwinCAT/BSD.

[CX2043-N011](#)

DisplayPort interface, additional DisplayPort for clone or extended display mode. Is not supported by TwinCAT/BSD.

[CX2043-N030](#)

RS232 interface, D-sub plug, 9-pin

[CX2043-N031](#)

RS485 interface, D-sub socket, 9-pin, configuration as an end point, without echo, termination on

[CX2043-N031-0001](#)

RS485 interface, D-sub socket, 9-pin, configuration as an end point, with echo, termination on

[CX2043-N031-0002](#)

RS485 interface, D-sub socket, 9-pin, configuration as drop point, without echo, termination off

[CX2043-N031-0003](#)

RS485 interface, D-sub socket, 9-pin, configuration as drop point, with echo, termination off

[CX2043-N031-0004](#)

RS422 interface, D-sub socket, 9-pin, configuration as full duplex end point, termination on

[CX2043-M112](#)

2 x EtherCAT master interface

[CX2043-B110](#)

EtherCAT slave interface, EtherCAT IN and OUT (2 x RJ45)

[CX2043-M310](#)

PROFIBUS master interface, D-sub socket, 9-pin

[CX2043-B310](#)

PROFIBUS slave interface, D-sub socket, 9-pin

[CX2043-M510](#)

CANopen master interface, D-sub plug, 9-pin

[CX2043-B510](#)

CANopen slave interface, D-sub plug, 9-pin

[CX2043-M930](#)

PROFINET RT, controller interface, Ethernet (2 x RJ45 switch)

[CX2043-B930](#)

PROFINET RT, device interface, Ethernet (2 x RJ45 switched)

Accessories

Accessories[CX2900-0026](#)

20 GB CFast card, 3D flash, extended temperature range (only for Windows CE or TwinCAT/BSD operating systems)

[CX2900-0038](#)

40 GB CFast card, 3D flash, extended temperature range

[CX2900-0040](#)

80 GB CFast card, 3D flash, extended temperature range

[CX2900-0042](#)

160 GB CFast card, 3D flash, extended temperature range

[CX2900-0044](#)

320 GB CFast card, 3D flash, extended temperature range

<u>CX2900-0101</u>	Housing locking clips (black) for the CX52x0, CX53x0, CX56x0 and CX20xx series 10 locking pin sets (each set consisting of two pieces)
<u>CX2900-0102</u>	Cover for left-side module bus connector, 5 pieces
<u>CX2900-0103</u>	Spare fan cartridge for CX20xx with fan option – cartridge consisting of chassis and 60 mm fan – simple exchange in the field due to wireless installation – dimensions (W x H x D) 67 x 62 x 16 mm
<u>C9900-K530,-K552,-K553,-K554</u>	USB cable, shielded, PVC, 1 x 2 x 28AWG + 2C 20AWG, fixed installation, black, USB A, plug, straight, male, 4-pin – USB B, plug, straight, male, 4-pin
<u>C9900-K569,-K570,K577</u>	USB cable, shielded, PVC, 2 x 2 x AWG28 + 1 x 2 AWG28 + 1 x 2 x AWG24, fixed installation, black, USB A, plug, straight, male, 9-pin – USB B, plug, straight, male, 9-pin
<u>ZK1090-9191-0xxx</u>	RJ45, plug, straight, male, 8-pin – RJ45, plug, straight, male, 8-pin
<u>ZK1093-9191-0xxx</u>	RJ45, plug, straight, male, 8-pin – RJ45, plug, straight, male, 8-pin
<u>C9900-K527,-K549,-K550,-K568</u>	Display cable, shielded, PVC, fixed installation, black, DVI-D, plug, straight, male, 18 + 1-pin – DVI-D, plug, straight, male, 18 + 1-pin
<u>C9900-K528,-K529,-K534...K537,-K688</u>	Display cable, shielded, PVC, 14 x AWG24, fixed installation, black, DVI-D, plug, straight, male, 18 + 1-pin – DVI-D, plug, straight, male, 18 + 1-pin
<u>C9900-K780...K783,-K820</u>	Display cable, shielded, PVC, fixed installation, black, DVI-D, plug, straight, male, 24 + 1-pin – DisplayPort, plug, straight, male, 20-pin
<u>C9900-K543,-K544,-K507,-K555,-K651</u>	Display cable, shielded, PVC, fixed installation, black, DVI-D, plug, straight, male, 24 + 1-pin – M16, plug, straight, female, 19-pin