

MB CAP ULTRA BUFFER MODUL

IN: 20,4-26,4VDC OUT:23VDC/3A for max.1A/21S

Art.No.: 85460

Weight: 0.6

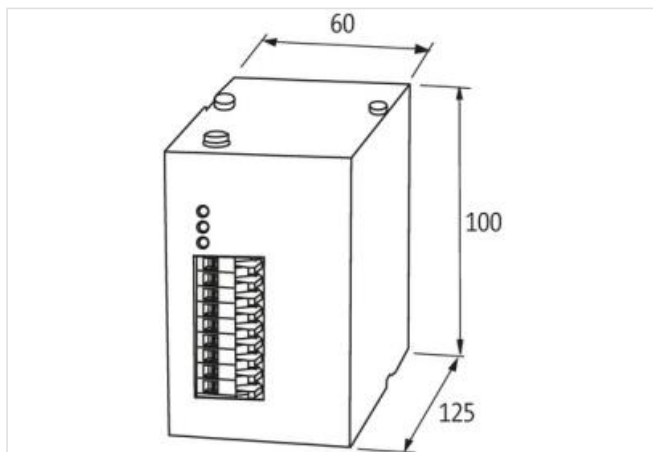
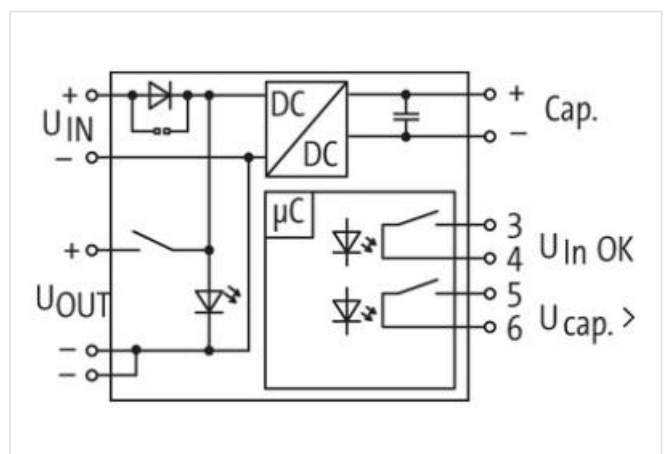
Country of origin: DE

Model designation: MB Cap Ultra 3/24 1A/21S

INPUT: 24 V DC (SELV/PELV)

OUTPUT: max. 3 A

7 s (3 A); 21 s (1 A)

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27049190
ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-8.0	27049002

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-06-05

Murrelektronik GmbH | Grabenstraße 29 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

ECLASS-9.0	27040705
ECLASS-10.1	27040705
ECLASS-11.1	27040705
ECLASS-12.0	27040705
ETIM-5.0	EC002584
customs tariff number	85322900
customs tariff number	85322900
EAN	4048879079808
EAN	4048879079808
Packaging unit	1
Packaging unit	1

Electrical data

Security level	SELV/PELV
----------------	-----------

Electrical data | Input

Input voltage DC min.	20,4 V
Input voltage DC max.	26,4 V
Current input AC	3 A
Charging time min.	25 s
Efficiency	90 %

Electrical data | Output

Output voltage DC	23 V
Output voltage DC min.	22,54 V
Output voltage DC max.	23,46 V
Output voltage adjustable	no
Output current max.	3 A

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Storage temperature min.	-20 °C
Storage temperature max.	60 °C

Conformity

Product standard	EN 60950, EN 50178
------------------	--------------------