

**MDD DC/DC-CONVERTOR SWITCH MODE**

IN: 24VDC OUT: 5V/1,5ADC

Art.No.: 85657

Weight: 0.1

Country of origin: CZ

Model designation: MDD 1,5-24/5

INPUT: 24 V DC

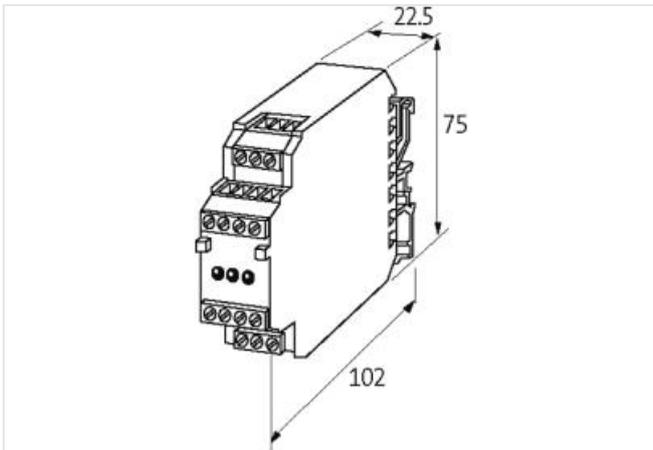
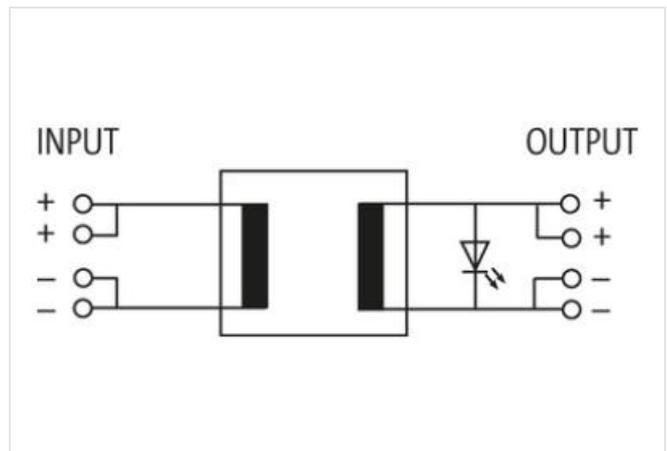
OUTPUT: 5 V DC

Output rating: 7.5 W

Current: 1.5 A

Condensation not permitted

Restart after overload by removing supply voltage

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0

27210901

ECLASS-6.1	27210901
ECLASS-7.0	27210901
ECLASS-8.0	27210901
ECLASS-9.0	27210901
ECLASS-10.1	27210901
ECLASS-11.1	27210901
ECLASS-12.0	27210901
ETIM-5.0	EC002540
customs tariff number	85043121
customs tariff number	85043121
EAN	4048879079532
EAN	4048879079532
Packaging unit	1
Packaging unit	1

**Electrical data**

Security level	SELV
----------------	------

**Electrical data | Input**

Input voltage DC	24 V
Current input AC	0,6 A
Fuse protection primary side internal	1,5 A
Characteristic back-up fuse	Inertia

**Electrical data | Output**

Output voltage DC	5 V
Output voltage DC min.	4,9 V
Output voltage DC max.	5,1 V
Output voltage adjustable	no
Output current max.	1,5 A
Ripple max.	0,2 %

**Device protection | Electrical**

Overload resistant	yes
Short-circuit protected	yes
Insulation test voltage input - output	4 kV

**Mechanical data | Mounting data**

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)

**Environmental characteristics | Climatic**

Operating temperature min.	0 °C
Operating temperature max.	50 °C

**Conformity**

Low Voltage Directive	EN 61204-3
-----------------------	------------

**Connection type 1**

Connection type 1	Output
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	4
PIN 1	+
PIN 2	+
PIN 3	-
PIN 4	-