

## MDD DC/DC-CONVERTOR SWITCH MODE

IN: 24VDC OUT: 2x15V/0,25ADC

Art.No.: 85659

Weight: 0.1

Country of origin: CZ

Model designation: MDD 050-24/+ -15V

INPUT: 24 V DC

OUTPUT:  $\pm 15$  V DC

Output rating: 7 W



Current:  $2 \times 0.25$  A

Condensation not permitted

Restart after overload by removing supply voltage

### [Link to Product](#)

#### Illustration

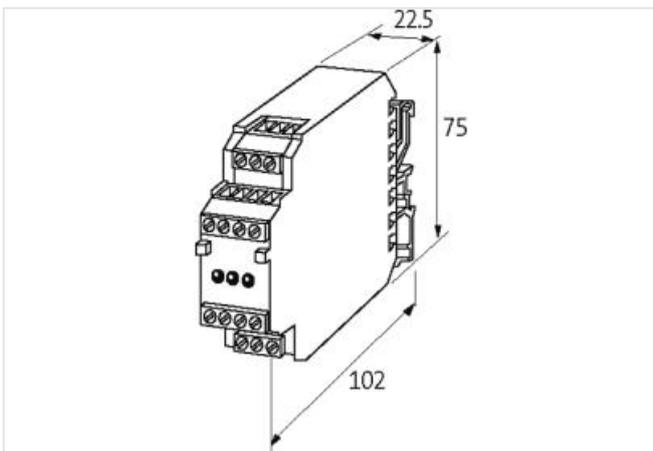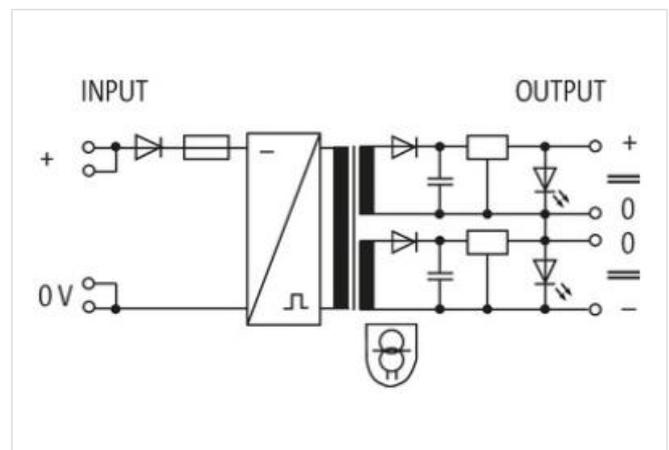

Product may differ from Image



#### Commercial data

ECLASS-6.0

27210901

ECLASS-6.1	27210901
ECLASS-7.0	27210901
ECLASS-8.0	27210901
ECLASS-9.0	27210901
ECLASS-10.1	27210901
ECLASS-11.1	27210901
ECLASS-12.0	27210901
ETIM-5.0	EC002540
customs tariff number	85043121
customs tariff number	85043121
EAN	4048879079518
EAN	4048879079518
Packaging unit	1
Packaging unit	1

**Electrical data**

Security level	SELV
----------------	------

**Electrical data | Input**

Input voltage DC	24 V
Current input AC	0,85 A
Fuse protection primary side internal	1,5 A
Characteristic back-up fuse	Inertia

**Electrical data | Output**

Output voltage DC	15 V
Output voltage DC min.	14,25 V
Output voltage DC max.	15,75 V
Output voltage adjustable	no
Output current per channel max.	0,25 A
Ripple max.	0,2 %

**Device protection | Electrical**

Overload resistant	yes
Short-circuit protected	yes
Insulation test voltage input - output	4 kV

**Mechanical data | Mounting data**

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)

**Environmental characteristics | Climatic**

Operating temperature min.	0 °C
Operating temperature max.	50 °C

**Conformity**

Low Voltage Directive	EN 61204-3
-----------------------	------------