

Magnetic field sensor


MB-F32-A2



- For mounting on a hydraulic cylinder
- Detects the piston position through the cylinder wall
- Suitable for magnetic, hydraulic cylinders made of steel



Dimensions

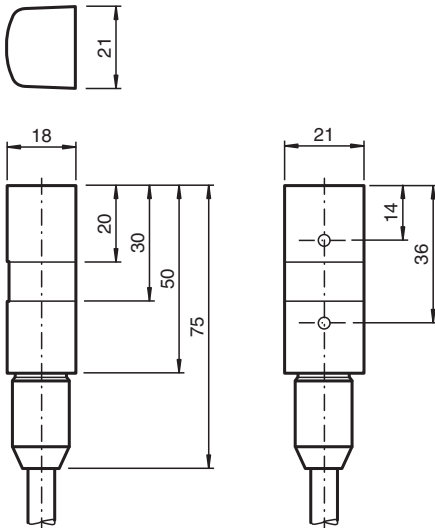

Technical Data

General specifications

Switching function	complementary	
Output type	PNP	
Connection	Switching output 1 : black Switching output 2 : white	
Installation	on the cylinder	
Output polarity	DC	
Switching range	s_b	typ. 50 mm
Output type	4-wire	

Nominal ratings

Operating voltage	U_B	10 ... 30 V DC
Reverse polarity protection	reverse polarity protected	
Short-circuit protection	pulsing	
Voltage drop	U_d	≤ 1.5 V
Operating current	I_L	0 ... 100 mA
No-load supply current	I_0	≤ 30 mA

Release date: 2025-01-13 Date of issue: 2025-01-13 Filename: 037712_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Functional safety related parameters

MTTF _d	739 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

LED indication	red: switching state output 1 yellow: switching state output 2
----------------	---

Compliance with standards and directives

Standard conformity	
Standards	EN IEC 60947-5-2

Approvals and certificates

CCC approval	CCC approval / marking not required for products rated ≤36 V
--------------	--


Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Connection type		cable
Housing material		Polyamide (PA)
Sensing face		Polyamide (PA)
Degree of protection		IP67
Cable		
Wire end ferrules		yes
Cable diameter		6.2 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Material		PVC
Color		black
Number of cores		4
Core cross section		0.5 mm²
Length	L	2 m
Dimensions		
Height		21 mm
Width		18 mm
Length		50 mm


Connection



Additional Information

Magnetic System

Primary Construction of the Magnetic System

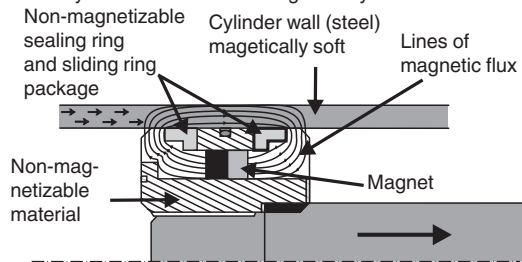


For this sensor principle it is not sufficient to simply mount the permanent magnet onto the piston. A magnetic system has to be constructed which conducts the magnetic flux of the permanent magnets directly into the cylinder wall in order to achieve the strongest possible magnetization. For further details regarding the construction of magnetic systems, refer to the manual. A field trial is generally recommended before practical operation!

Magnets

The magnets are axially magnetized. It must be ensured that all magnets are mounted with the same polarity!

Definition of polarity

An approaching permanent magnet with the north pole pointing towards the cable connection of the sensor causes output 1 to respond and the red LED to light.



Antivalent output

By means of the sensor's antivalent output stage the appropriate output can be chosen depending on the polarity of the magnetic system or the mounting location of the sensor.

Mounting

The sensor is mounted directly on the surface towards the cylinder axis. For this purpose, pressure bands, tightening straps, or hose band clamps can be used.