



BN 65-01Z

- With pre-wired cable
- Actuation from side
- with bias magnet
- Non-contact principle
- Long life
- Actuating surface and direction of actuation marked by switch symbol
- Construction form Ø 13 mm
- Thermoplastic enclosure
- Actuating distance up to 60 mm depending on actuating magnet and version
- with central mounting

Data

Ordering data

Product type description	BN 65-01Z
Article number (order number)	101055796
EAN (European Article Number)	4030661009476
eCl@ss number, version 12.0	27-27-43-02
eCl@ss number, version 11.0	27-27-01-05
eCl@ss number, version 9.0	27-27-01-05
ETIM number, version 7.0	EC002544
ETIM number, version 6.0	EC002544

Approvals - Standards

General data

Working principle	Magnetic drive
Housing construction form	Cylinder smooth
Housing material	Glass-fibre, reinforced thermoplastic
Gross weight	65 g

General data - Features

Suitable for elevators	Yes
bias magnet	Yes
Number of normally closed (NC)	1

Mechanical data

Actuating panels	lateral
Actuating element	Magnet
Mechanical life, minimum	1,000,000,000 Operations
Actuating speed, maximum	18 m/s
Mounting	central with threaded flange
Tightening torque of nuts, maximum	3 Nm

Mechanical data - Switching distances according EN IEC 60947-5-3

Switching distance S_n	5 mm ... 50 mm
	BP 10 = 5 mm
	2 x BP 10 = 17 mm
	BP 15 = 6 mm
	2 x BP 15 = 17 mm
	2 x BP 15/2 = 17 mm
	BP 34 = 15 ... 20 mm
	BP 20 = 20 mm
	BP 31 = 20 mm
	BP 11 = 20 mm
	BP 12 = 10 ... 30 mm
	BP 21 = 25 ... 50 mm

Note (Switching distance S_n) Actuating distance up to 50 mm depending on actuating magnet and version. The specified switching distances are applicable for the actuation of individually mounted components without ferromagnetic influence. A change of the distance, either positive or negative, is possible due to ferromagnetic influences. The mutual interference between multiple actuating magnets must be observed.

Repeat accuracy R 0.3 mm

Mechanical data - Connection technique

Length of cable	1 m
Termination	Cable
Wire cross-section	0.75 mm ²
Wire cross-section	18 AWG
Material of the Cable mantle	H03VV-F

Mechanical data - Dimensions

Diameter of sensor	13 mm
width across flats	22 BK
Length of sensor	103 mm

Ambient conditions

Degree of protection	IP67
Ambient temperature	-25 ... +75 °C
Resistance to vibrations	10 ... 55 Hz, amplitude 1 mm
Resistance to shock	30 g, on sine wave oscillation

Resistant to vibration 30 g, on sine wave oscillation

Electrical data

Switching voltage, maximum	250 VAC
Switching current, maximum	3 A
Switching capacity, maximum	120 W
Switching element	Opener (NC)
Bounce duration, minimum	0.3 ms
Bounce duration, maximum	0.6 ms
Switching frequency, maximum	300 Hz
Maximum switching frequency	1,080,000 /h

Electrical data - Digital Output

Design of control elements	Reed contacts
----------------------------	---------------

Scope of delivery

Scope of delivery	Actuator must be ordered separately.
-------------------	--------------------------------------

Accessory

Recommendation (actuator)	BP 10
	2x BP 10
	BP 15
	2x BP 15
	2x BP 15/2
	BP 34
	BP 20
	BP 31
	BP 11
	BP 12
	BP 21

Recommendation (actuator, lift switchgear)	BP 10
	2 x BP 15/2
	2 x BP 15
	2 x BP 10
	BP 15
	BP 34

Note

Note (General)	The opening and closing functions depend on the direction of actuation, the actuating magnets and the polarity of the actuating magnets. When the switches and actuators come together, the colours must coincide: Red (S) to red (S) and green (N) to green (N). This does not apply to the bistable contact.
----------------	---

Pictures

Product picture (catalogue individual photo)




ID: kbn65f01

| 303.0 kB | .jpg | 90.664 x 656.519 mm - 257 x 1861 px - 72 dpi

| 252.7 kB | .png | 74.083 x 536.222 mm - 210 x 1520 px - 72 dpi

| 9.9 kB | .jpg | 16.933 x 123.472 mm - 48 x 350 px - 72 dpi

Dimensional drawing basic component

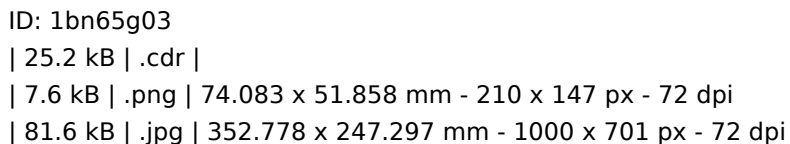

ID: ksbn4sx2
| 18.1 kB | .cdr |
| 1.1 kB | .png | 74.083 x 18.697 mm - 210 x 53 px - 72 dpi
| 24.2 kB | .jpg | 352.778 x 88.194 mm - 1000 x 250 px - 72 dpi

The technical drawing shows a cable with a cross-section and a perspective view. The cross-section is a circle with a central core and several surrounding strands. The perspective view shows the cable with a braided shield and a central conductor. A compass rose indicates the orientation of the cable.

ID: 1bn65k12
| 25.7 kB | .cdr |
| 97.9 kB | .jpg | 352.778 x 243.769 mm - 1000 x 691 px - 72 dpi
| 12.6 kB | .png | 74.083 x 51.153 mm - 210 x 145 px - 72 dpi

The graph shows the relationship between current A (in Amperes) and voltage V (in Volts) for a resistor. The curve is a hyperbola, indicating that the resistance is constant. The data points are as follows:

Voltage V (V)	Current A (A)
24	3.0
80	1.0
120	0.8
250	0.48

ID: kbn32d03
| 3.1 kB | .png | 73.731 x 77.964 mm - 209 x 221 px - 72 dpi
| 116.4 kB | .jpg | 352.425 x 371.828 mm - 999 x 1054 px - 72 dpi

The details and data referred to have been carefully checked. Images may diverge from original. Further technical data can be found in the manual. Technical amendments and errors possible.

Generated on: 22/08/2024, 1:59 pm