

## ADMIRAL AX 1352 BK

Order Code: 1334168

Hand Detection Safety Light Curtain with Blanking Function, Automatic/Manual Restart and EDM



### Safety level

Type 4 - PL e

### Protected height (mm)

1360

### Resolution (mm)

20

### Max. range (m)

18

### Restart

Built-in - User selectable automatic or manual

### Functioning system

Emitter / Receiver

### Blanking function

Floating

## Technical Description

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4

Cross Section: 35 x 45 mm

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

## Features

Safety level	Type 4 - PL e
Protected height (mm)	1360
Resolution (mm)	20
Max. range (m)	18
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Blanking function	Floating
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	0 ... 55
Response time (ms)	21
Number of beams	135
Max. length of the connection cables (m)	100
Signalling	7 segment display and LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connector (emitter), M12 8-pole connector (receiver)
MTTFD (ISO13849) years	67,12
PFHD (IEC 61508)	2,25E-08
Blanking without object presence obligation	1 or 2 beams, 1, 2 or 3 beams

**ADMIRAL AX 1352 BK**

Safety outputs	2 OSSD PNP (500 mA at 24 VDC)
----------------	-------------------------------

Safety functions	With external module
------------------	----------------------

Detection	Hand
-----------	------

Protective enclosures	None
-----------------------	------

Packaging dimensions HxLxW (mm)	145 x 1530 x 200
------------------------------------	------------------

Product class	C
---------------	---

Custom tariff	85365019
---------------	----------

## Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data

Overall height (mm)	1461
---------------------	------


Cross section dimensions (mm)	35 x 45
-------------------------------	---------

Degree of protection	IP65
----------------------	------

Fastening	Back slot, side slot with set of LS type brackets (included) or to the top and lower end with SFB swivel brackets (optional)
-----------	------------------------------------------------------------------------------------------------------------------------------

Gross weight (g)	6828,26
------------------	---------

## Technical drawings

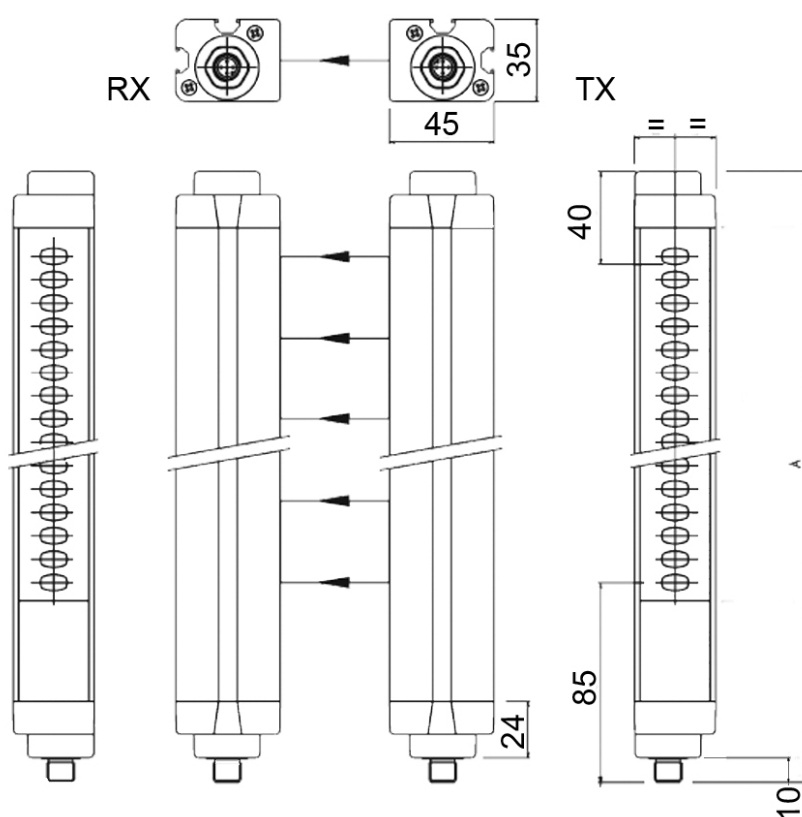

## Certificates

