ADMIRAL AX 3B LR

Order Code: **1334604**

Access Control Safety Light Grid with Automatic/Manual Restart and EDM, Long Range

Safety level
Type 4 - PL e

Protected height (mm)
800

Resolution (mm)
Multi-beams

Max. range (m)
60

Restart
Built-in - User selectable automatic or manual

Functioning system
Emitter / Receiver

Technical Description

Safety Light Curtain: Type 4, SILCL 3, PL e, Cat. 4
Cross Section: 35 x 45 mm
Hardware configuration: no programming necessary, easy to install and replace
Connection and configuration through M12 connectors
Unshielded cables up to 100 m can be used to connect the Safety Light Curtain
What's in the Box: Emitter, Receiver and Standard Fastening Brackets

Features

Safety level	Type 4 - PL e
Protected height (mm)	800
Resolution (mm)	Multi-beams
Max. range (m)	60
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	0 ... 55
Response time (ms)	6
Number of beams	3
Max. length of the connection cables (m)	100
Signalling	7 segment display and LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (500 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connector (emitter), M12 8-pole connector (receiver)
MTTFD (ISO13849) years	100
PFHD (IEC 61508)	9,15E-09
Safety outputs	2 OSSD PNP (500 mA at 24 VDC)
Safety functions	Integrated
Detection	Access control

ADMIRAL AX 3B LR

Protective enclosures	None
Packaging dimensions HxLxW (mm)	145 x 1070 x 200
Product class	C
Custom tariff	85365019

Electrical data

Power supply (VDC)	24 ± 20%

Mechanical data

Overall height (mm)	1001
Cross section dimensions (mm)	35 x 45
Degree of protection	IP65
Fastening	Back slot, side slot with set of LS type brackets (included) or to the top and lower end with SFB swivel brackets (optional)
Gross weight (g)	4694,26

Technical drawings

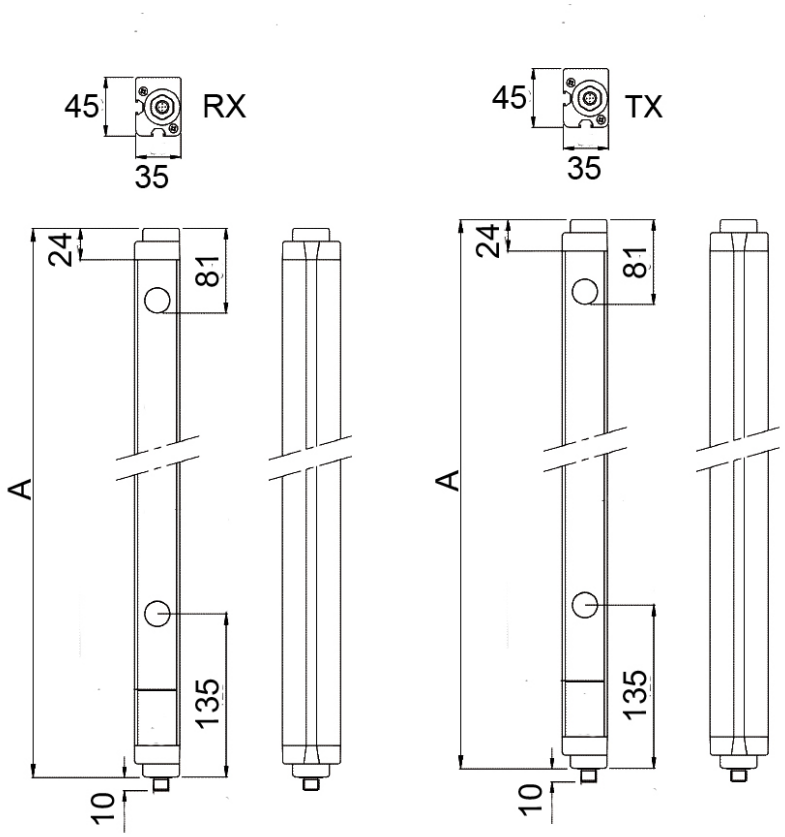

Certificates