

EOS4 1803 XH WTHF

Order Code: 1110058

Hand Detection Safety Light Curtain with Heated Watertight Enclosure. IP69K/Ecolab Certified. Automatic/Manual Restart and EDM. Extended Range. Prewired with 10 m Lead Cable



Safety level

Type 4 - PL e

Protected height (mm)

1810

Resolution (mm)

30

Max. range (m)

17

Restart

Built-in - User selectable automatic or manual

Functioning system

Emitter / Receiver

Technical Description

Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Watertight enclosures allow Safety Light Curtains to be used in harsh working environments with exposure to water jets and steam

The use of inert and non-toxic components allow WTF and WTHF enclosures to be used in the Food & Beverage industry, where frequent wash down procedures are required

Integrated anti-condensation system

Hardware configuration: no programming necessary, easy to install and replace

What's in the Box: Emitter, Receiver, Standard Fastening Brackets, Pre-Wired Connection Cable

EOS4 1803 XH WTHF

Features

Safety level	Type 4 - PL e
Protected height (mm)	1810
Resolution (mm)	30
Controlled height (mm)	1800
Max. range (m)	17
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 25 ... 50
Response time (ms)	13
Number of beams	91
Max. length of the connection cables (m)	100
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	Cable output
MTTFD (ISO13849) years	100
PFHD (IEC 61508)	2,29E-08
Materials suitable for food applications	Yes
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	Integrated

EOS4 1803 XH WTHF

Special versions	Food and beverage, Heated, Watertight enclosure
------------------	---

Detection	Hand
-----------	------

Protective enclosures	Food industry IP69K
-----------------------	---------------------

Packaging dimensions HxLxW (mm)	145 x 2110 x 200
------------------------------------	------------------

Product class	C
---------------	---

Custom tariff	85365019
---------------	----------

Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

Mechanical data

Overall height (mm)	1987
---------------------	------

Degree of protection	IP69K
----------------------	-------


Fastening	Set of 4 ring brackets (included)
-----------	-----------------------------------

Diameter (mm)	56
---------------	----

Max. water pressure (bar)	80 . . . 100
---------------------------	--------------

Gross weight (g)	9298,99
------------------	---------

Technical drawings

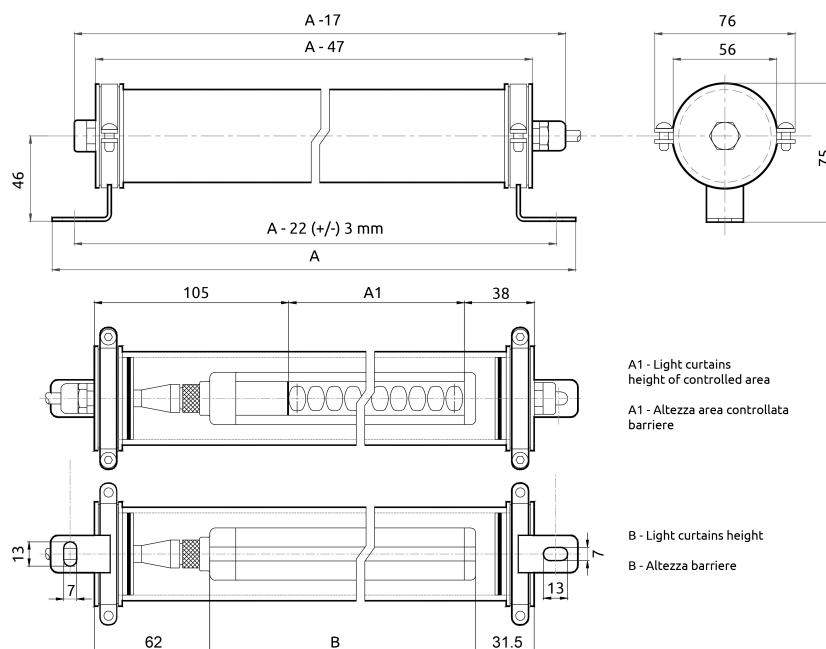

Certificates

