EXER Your future's safe!

EOS4 1809 XH

Order Code: 1310583

Body Detection Safety Light Curtain with Automatic/Manual Restart and EDM, Extended Range



Safety level

Type 4 - PL e

Protected height (mm)

1810

Resolution (mm)

90

Max. range (m)

20

Restart

Built-in - User selectable automatic or manual

Functioning system

Emitter / Receiver

Technical Description

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 30 mm No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

EOS4 1809 XH



Features

Safety level	Type 4 - PL e
Protected height (mm)	1810
Resolution (mm)	90
Controlled height (mm)	1800
Max. range (m)	20
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 20 55
Response time (ms)	5
Number of beams	24
Max. length of the connection	100
cables (m)	
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against
	short circuit, overload and reverse polarity
Connections	M12 5-pole connector (emitter), M12 8-pole connector
	(receiver)
MTTFD (ISO13849) years	463,5
PFHD (IEC 61508)	1,35E-08
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	Integrated
Detection	Body



Protective enclosures None

Packaging dimensions HxLxW 145 x 1920 x 200

(mm)

Product class C

Custom tariff 85365019

Electrical data

Power supply (VDC) $24 \pm 20\%$

Mechanical data

Overall height (mm) 1863

Cross section dimensions (mm) 28 x 30

Degree of protection IP65 - IP67


Fastening Back slot with set of LE type brackets (included) or to the top


and lower end with swivel brackets SFB E (optional)


Gross weight (g) 5638,76



Technical drawings

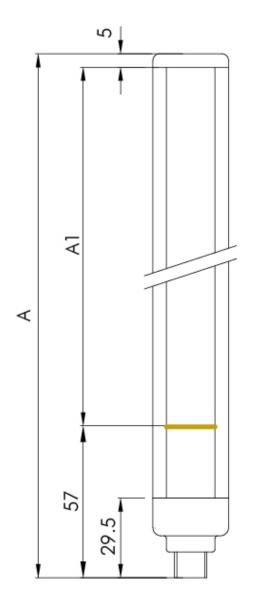







Certificates

















