

## EOS4 2104 XS

Order Code: 1310764

Hand Detection Safety Light Curtain for Cascading Connection with Automatic/Manual Restart and EDM (Primary Slave)



### Safety level

Type 4 - PL e

### Protected height (mm)

2110

### Resolution (mm)

40

### Max. range (m)

12

### Restart

Built-in - User selectable automatic or manual

### Functioning system

Emitter / Receiver

### Master Slave Models

yes

## Technical Description

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 30 mm

No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

## Features

Safety level	Type 4 - PL e
Protected height (mm)	2110
Resolution (mm)	40
Controlled height (mm)	2100
Max. range (m)	12
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Master Slave Models	yes
Safety level (SIL / PL)	Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 30 ... 55
Response time (ms)	See technical manual
Number of beams	71
Max. length of the connection cables (m)	100 (50 between Master and Slave)
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connectors
MTTFD (ISO13849) years	143,5
PFHD (IEC 61508)	1,96E-08
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	Integrated
Detection	Hand

## EOS4 2104 XS

Protective enclosures	None
-----------------------	------

Packaging dimensions HxLxW (mm)	0 x 0 x 0
------------------------------------	-----------

Product class	C
---------------	---

Custom tariff	85365019
---------------	----------

## Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data


Overall height (mm)	2163
---------------------	------

Cross section dimensions (mm)	28 x 30
-------------------------------	---------

Degree of protection	IP65 - IP67
----------------------	-------------

Fastening	Back slot with set of LE type brackets (included) or to the top and lower end with swivel brackets SFB E (optional)
-----------	---

## Technical drawings

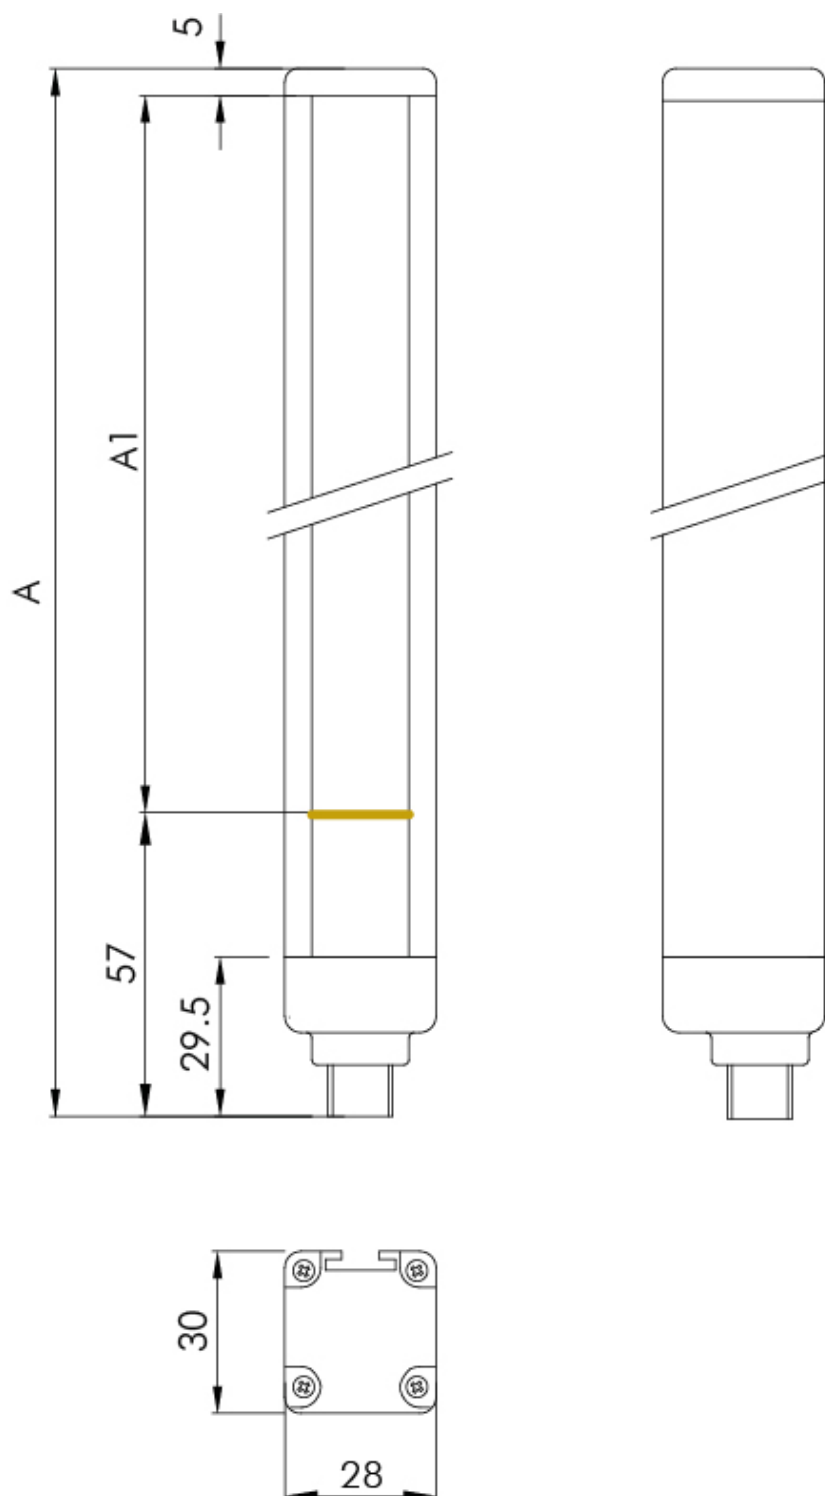

## Certificates

