

EOS4 3B XS2

Order Code: 1310641

Access Control Safety Light Grid for Cascading Connection with Automatic/Manual Restart and EDM (Secondary Slave)



Safety level

Type 4 - PL e

Protected height (mm)

810

Resolution (mm)

Multi-beams

Max. range (m)

12

Restart

Built-in - User selectable automatic or manual

Functioning system

Emitter / Receiver

Master Slave Models

yes

Technical Description

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 30 mm

No blind area on one side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 connectors

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

Features

Safety level	Type 4 - PL e
Protected height (mm)	810
Resolution (mm)	Multi-beams
Controlled height (mm)	890
Max. range (m)	12
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Master Slave Models	yes
Safety level (SIL / PL)	Type 4 - SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 30 ... 55
Response time (ms)	See technical manual
Number of beams	3
Max. length of the connection cables (m)	100 (50 between Master and Slave)
Signalling	LEDs for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole connectors
MTTFD (ISO13849) years	560,5
PFHD (IEC 61508)	8,85E-09
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Safety functions	Integrated
Detection	Access control

EOS4 3B XS2

Protective enclosures	None
-----------------------	------

Packaging dimensions HxLxW (mm)	0 x 0 x 0
------------------------------------	-----------

Product class	C
---------------	---

Custom tariff	85365019
---------------	----------

Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

Mechanical data


Overall height (mm)	977
---------------------	-----

Cross section dimensions (mm)	28 x 30
-------------------------------	---------

Degree of protection	IP65 - IP67
----------------------	-------------

Fastening	Back slot with set of LE type brackets (included) or to the top and lower end with swivel brackets SFB E (optional)
-----------	---

Technical drawings

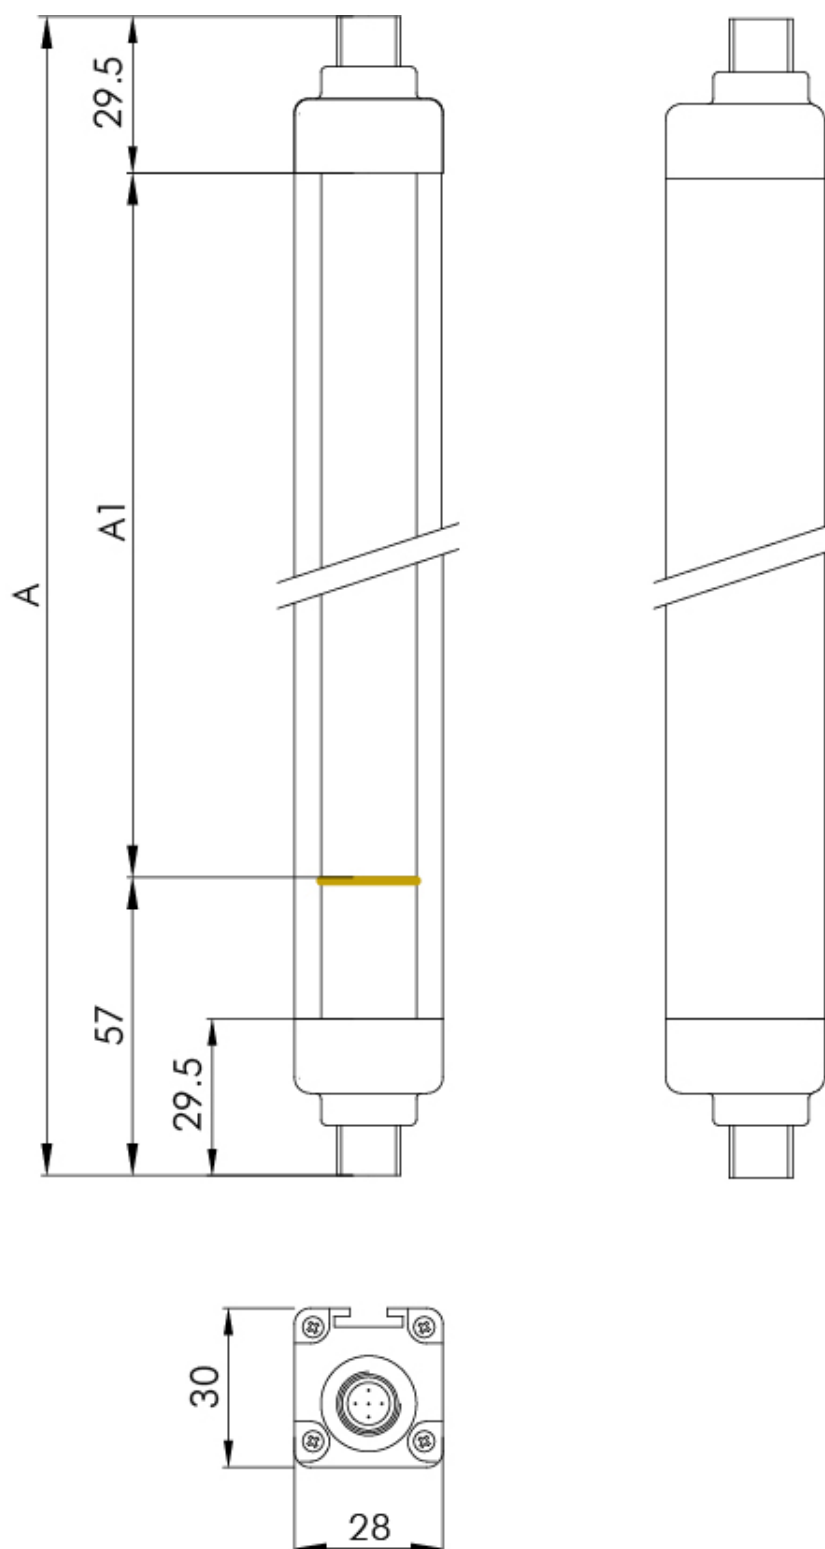

Certificates

