

MOSAIC MV1T

Order Code: 1100070

Safety Speed Monitoring Expansion Unit, 1 Input for TTL Encoder, Screw Terminal Blocks



Safety level

PL e

Safety inputs

2 digital inputs

Max. number of proximity

2

Max. number of encoders

1

Technical Description

Safety Speed Monitoring (up to PL e) for: zero speed control, max. speed, speed range and direction control

RJ-45 connectors for encoders and terminal blocks for proximity switches

Max. input frequency for encoders: up to 500 KHz (300 KHz for HTL encoder)

Max. input frequency for proximity switches: up to 5 KHz

Features

Safety level	PL e
Safety inputs	2 digital inputs
Safety level (SIL / PL)	SIL 3 - SILCL 3 - PL e - Cat. 4
Operating temperature (°C)	- 10 ... 55
Signalling	LEDs indication for operating status and fault diagnosis. LED indication of the: proximity/encoder inputs and speed of the controlled axis (within the range, stand still, overspeed) condition
Connections	Removable terminal blocks, screw contacts
MTTFD (ISO13849) years	30 ... 100
PFHD (IEC 61508)	8,58E-09
Storage temperature (°C)	-20 ... +85
MSC connector provided	Yes
Connection with MSC BUS	Yes
Proximity connections	Terminal blocks
Max. number of proximity	2
Max. number of encoders	1
Max. number of axes	2
Encoder connections	RJ45
Encoder Interface	TTL
Packaging dimensions HxLxW (mm)	36 x 127 x 113
Product class	C

MOSAIC MV1T

Custom tariff

85371091

Electrical data

Power supply (VDC)	24 ± 20%
--------------------	----------

Max. proximity frequency (KHz)	5
--------------------------------	---

Max. encoder frequency (KHz)	500
------------------------------	-----

Mechanical data


Dimensions HxWxD (mm)	108 x 22,5 x 114,5
-----------------------	--------------------

Degree of protection	IP20 for housing - IP2X for terminal block
----------------------	--

Fastening	35 mm DIN rail fastening according to EN 50022-35 standard
-----------	--

Gross weight (g)	190,4
------------------	-------

Technical drawings

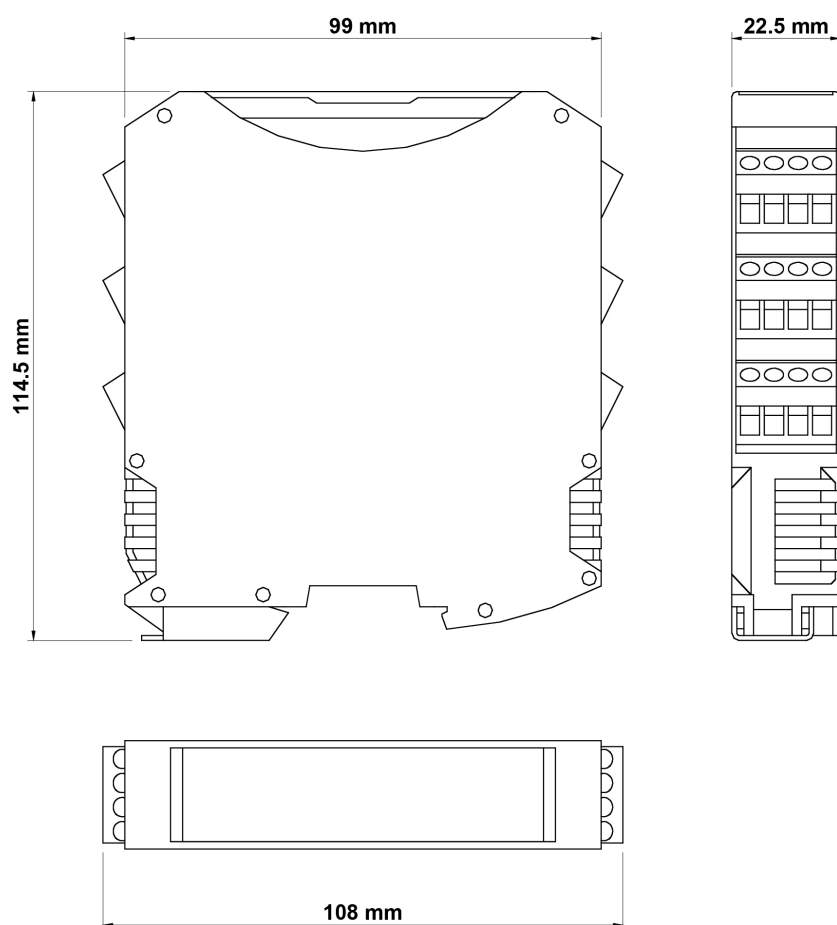

Certificates

