

Technical data sheet Throughbeam photoelectric sensor transmitter Part no.: 50117694 LS5/9D



Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com • changes The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2024-03-06

We reserve the right to make technical changes

5

Transmitter

Throughbeam principle

Deactivation input

Polarity reversal protection

Technical data

Leuze

Basic data

Series **Operating principle** Device type

Special version

Special version

Optical data

Operating range	0 10 m
Operating range	Guaranteed operating range
Operating range limit	Typical operating range
Operating range limit	0 15 m
Light source	LED, Red
Wavelength	620 nm
Transmitted-signal shape	Pulsed
LED group	Exempt group (in acc. with EN 62471)

Electrical data

Protective circuit

	Short circuit protected
Performance data	
Supply voltage U _B	10 30 V, DC, Incl. residual ripple
Residual ripple	0 15 %, From U _B
Open-circuit current	0 15 mA
Inputs	
Number of deactivation inputs	2 Piece(s)
Deactivation inputs	
Deactivation input 1	
Active switching state	Low
Deactivation input 2	
Active switching state	High
ime behavior	
eadiness delay	300 ms

Dimension (W x H x L) 14 mm x 32.5 mm x 20.2 mm Plastic Housing material Plastic housing ABS Lens cover material Plastic Net weight 70 g Housing color Black Red **Operation and display** Type of display LED Number of LEDs 2 Piece(s) **Environmental data** Ambient temperature, operation -40 ... 60 °C Ambient temperature, storage -40 ... 70 °C Certifications Degree of protection IP 67 Ш Protection class c UL US Certifications Standards applied IEC 60947-5-2 Classification Customs tariff number 85365019 ECLASS 5.1.4 27270901 ECLASS 8.0 27270901 ECLASS 9.0 27270901 ECLASS 10.0 27270901 ECLASS 11.0 27270901 **FCI ASS 12.0** 27270901 ECLASS 13.0 27270901 ECLASS 14.0 27270901 **ETIM 5.0** EC002716 **ETIM 6.0** EC002716 **ETIM 7.0** EC002716

EC002716

EC002716

Mechanical data

ETIM 8.0

ETIM 9.0

Ti

Readiness delay


Connection

Connection 1	
Function	Signal IN
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm ²

Dimensioned drawings

Leuze

All dimensions in millimeters

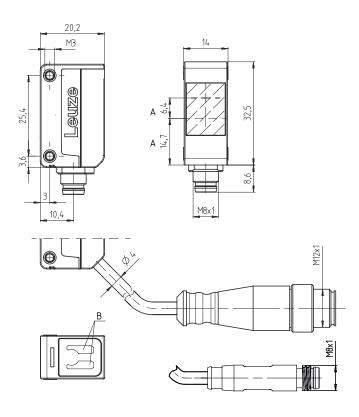

- A Optical axis
- B Indicator diode

Electrical connection

Connection 1

Function	Signal IN
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PUR
Cable color	Black
Number of conductors	4 -wire
Wire cross section	0.2 mm ²

Co	nd	ucto	r co	lor
00	nu	ucio		


Conductor assignment


Brown	V+
White	In2
Blue	GND
Black	In1

Diagrams

Leuze

Typ. response behavior

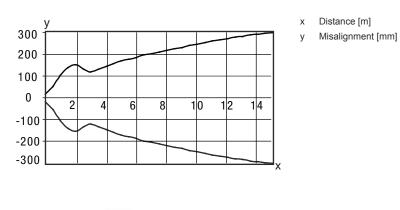



Operation and display

LED	Display	Meaning
1	Green, continuous light	Operational readiness
2	Yellow, continuous light	Transmitted beam active

Suitable receivers

 Part no.	Designation	Article	Description
50132420	LE5/2	Throughbeam photoelectric sensor receiver	Operating range limit: 0 12 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, NPN, Light switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire
50117688	LE5/2N	Throughbeam photoelectric sensor receiver	Operating range limit: 0 15 m Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, NPN, Light switching Switching output 2: Transistor, NPN, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 4 -wire
50132417	LE5/4	Throughbeam photoelectric sensor receiver	Operating range limit: 0 12 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, PNP, Light switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire
50117691	LE5/4P	Throughbeam photoelectric sensor receiver	Operating range limit: 0 15 m Supply voltage: DC Digital switching outputs: 2 Piece(s) Switching output 1: Transistor, PNP, Light switching Switching output 2: Transistor, PNP, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 4 -wire

Suitable receivers

Leuze

Part no.	Designation	Article	Description
50135925	LE5/N	Throughbeam photoelectric sensor receiver	Operating range limit: 0 12 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, NPN, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire
50135926	LE5/P	Throughbeam photoelectric sensor receiver	Operating range limit: 0 12 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, PNP, Dark switching Switching frequency: 500 Hz Connection: Cable, 2,000 mm, 3 -wire

Part number code

Part designation: AAA5d.EE/ ff-GG-hh-l

AAA5	Operating principle / construction HT5: diffuse reflection sensor with background suppression LS5: throughbeam photoelectric sensor transmitter LE5: throughbeam photoelectric sensor receiver ET5: energetic diffuse reflection sensor FT5: diffuse reflection sensor with fading PRK5: retro-reflective photoelectric sensor with polarization filter
d	Light type n/a: red light I: infrared light
EE	Equipment 1: adjustable range M: for semi-transparent objects H: For the detection of transparent films X: reinforced fading 3: teach-in via button R: combination product for reflector DTKS 30x50
ff	Switching output / function / OUT1OUT2 (OUT1 = pin 4, OUT2 = pin 2) 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching X: pin not used 9: deactivation input (deactivation with high signal) D: Deactivation input (deactivation with low signal)
GG	Version P1: narrow light beam
hh	Electrical connection n/a: cable, standard length 2000 mm, 4-wire M8: M8 connector, 4-pin (plug) M8.3: M8 connector, 3-pin (plug) 200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug) 200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug) 200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug) 200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug) M8.1: Snap-in, M8 connector, 4-pin (plug)
I	Parameterization P1: different configuration
Note	



Notes

Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

 $\ensuremath{^{\ensuremath{\oplus}}}$ The product may only be put into operation by competent persons.



For UL applications:

♦ Only for use in "class 2" circuits

These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

Further information

- Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 $^\circ\text{C}$

Accessories

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
5.	50118542	BT 200M.5	Mounting bracket	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Adjustable Material: Stainless steel
	50124651	BT 205M-10SET	Mounting device set	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Rigid Material: Metal

Mounting technology - Rod mounts

	Part no.	Designation	Article	Description
100	50117829	BTP 200M-D12	Mounting system	Design of mounting device: Protection hood Fastening, at system: For 12mm rod Mounting bracket, at device: Screw type Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal

Leuze

Accessories

Leuze

 Part no.	Designation	Article	Description
50117255	BTU 200M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Clampable, Adjustable, Turning, 360° Material: Metal

	Note
6	☆ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.