



power contactor, AC-3e/AC-3, 12 A, 5.5 kW / 400 V, 3-pole, 21-28 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 1 NO + 1 NC, spring-loaded terminal, size: S0

|                                                                                                              |                                                            |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| product brand name                                                                                           | SIRIUS                                                     |
| product designation                                                                                          | Power contactor                                            |
| product type designation                                                                                     | 3RT2                                                       |
| General technical data                                                                                       |                                                            |
| size of contactor                                                                                            | S0                                                         |
| product extension                                                                                            |                                                            |
| • function module for communication                                                                          | No                                                         |
| • auxiliary switch                                                                                           | Yes                                                        |
| power loss [W] for rated value of the current                                                                |                                                            |
| • at AC in hot operating state                                                                               | 0.9 W                                                      |
| • at AC in hot operating state per pole                                                                      | 0.3 W                                                      |
| • without load current share typical                                                                         | 1.4 W                                                      |
| type of calculation of power loss depending on pole                                                          | quadratic                                                  |
| insulation voltage                                                                                           |                                                            |
| • of main circuit with degree of pollution 3 rated value                                                     | 690 V                                                      |
| • of auxiliary circuit with degree of pollution 3 rated value                                                | 690 V                                                      |
| surge voltage resistance                                                                                     |                                                            |
| • of main circuit rated value                                                                                | 6 kV                                                       |
| • of auxiliary circuit rated value                                                                           | 6 kV                                                       |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V                                                      |
| shock resistance at rectangular impulse                                                                      |                                                            |
| • at AC                                                                                                      | 7,5g / 5 ms, 4,7g / 10 ms                                  |
| • at DC                                                                                                      | 10g / 5 ms, 7,5g / 10 ms                                   |
| shock resistance with sine pulse                                                                             |                                                            |
| • at AC                                                                                                      | 11,8g / 5 ms, 7,4g / 10 ms                                 |
| • at DC                                                                                                      | 15g / 5 ms, 10g / 10 ms                                    |
| mechanical service life (operating cycles)                                                                   |                                                            |
| • of contactor typical                                                                                       | 10 000 000                                                 |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                                                  |
| • of the contactor with added auxiliary switch block typical                                                 | 10 000 000                                                 |
| reference code according to IEC 81346-2                                                                      | Q                                                          |
| Substance Prohibitance (Date)                                                                                |                                                            |
| SVHC substance name                                                                                          | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8 |
| Weight                                                                                                       | 0.608 kg                                                   |
| Ambient conditions                                                                                           |                                                            |
| installation altitude at height above sea level maximum                                                      | 2 000 m                                                    |
| ambient temperature                                                                                          |                                                            |
| • during operation                                                                                           | -25 ... +60 °C                                             |

|                                                                        |                    |
|------------------------------------------------------------------------|--------------------|
| • during storage                                                       | -55 ... +80 °C     |
| <b>relative humidity minimum</b>                                       | 10 %               |
| <b>relative humidity at 55 °C according to IEC 60068-2-30 maximum</b>  | 95 %               |
| <b>Environmental footprint</b>                                         |                    |
| Environmental Product Declaration(EPD)                                 | Yes                |
| Global Warming Potential [CO2 eq] total                                | 59.7 kg            |
| Global Warming Potential [CO2 eq] during manufacturing                 | 3.7 kg             |
| Global Warming Potential [CO2 eq] during operation                     | 56.6 kg            |
| Global Warming Potential [CO2 eq] after end of life                    | -0.626 kg          |
| <b>Main circuit</b>                                                    |                    |
| <b>number of poles for main current circuit</b>                        | 3                  |
| <b>number of NO contacts for main contacts</b>                         | 3                  |
| <b>operating voltage</b>                                               |                    |
| • at AC-3 rated value maximum                                          | 690 V              |
| • at AC-3e rated value maximum                                         | 690 V              |
| <b>operational current</b>                                             |                    |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 40 A               |
| • at AC-1                                                              |                    |
| — up to 690 V at ambient temperature 40 °C rated value                 | 40 A               |
| — up to 690 V at ambient temperature 60 °C rated value                 | 35 A               |
| • at AC-3                                                              |                    |
| — at 400 V rated value                                                 | 12 A               |
| — at 500 V rated value                                                 | 12 A               |
| — at 690 V rated value                                                 | 9 A                |
| • at AC-3e                                                             |                    |
| — at 400 V rated value                                                 | 12 A               |
| — at 500 V rated value                                                 | 12 A               |
| — at 690 V rated value                                                 | 9 A                |
| • at AC-4 at 400 V rated value                                         | 12.5 A             |
| • at AC-5a up to 690 V rated value                                     | 35.2 A             |
| • at AC-5b up to 400 V rated value                                     | 9.9 A              |
| • at AC-6a                                                             |                    |
| — up to 230 V for current peak value n=20 rated value                  | 11.4 A             |
| — up to 400 V for current peak value n=20 rated value                  | 11.4 A             |
| — up to 500 V for current peak value n=20 rated value                  | 11.3 A             |
| — up to 690 V for current peak value n=20 rated value                  | 9 A                |
| • at AC-6a                                                             |                    |
| — up to 230 V for current peak value n=30 rated value                  | 7.6 A              |
| — up to 400 V for current peak value n=30 rated value                  | 7.6 A              |
| — up to 500 V for current peak value n=30 rated value                  | 7.6 A              |
| — up to 690 V for current peak value n=30 rated value                  | 7.6 A              |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 10 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                    |
| • at 400 V rated value                                                 | 5.5 A              |
| • at 690 V rated value                                                 | 5.5 A              |
| <b>operational current</b>                                             |                    |
| • <b>at 1 current path at DC-1</b>                                     |                    |
| — at 24 V rated value                                                  | 35 A               |
| — at 60 V rated value                                                  | 20 A               |
| — at 110 V rated value                                                 | 4.5 A              |
| — at 220 V rated value                                                 | 1 A                |
| — at 440 V rated value                                                 | 0.4 A              |
| — at 600 V rated value                                                 | 0.25 A             |
| • <b>with 2 current paths in series at DC-1</b>                        |                    |
| — at 24 V rated value                                                  | 35 A               |
| — at 60 V rated value                                                  | 35 A               |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                   | 35 A<br>5 A<br>1 A<br>0.8 A                                                                                            |
| <ul style="list-style-type: none"> <li>● <b>with 3 current paths in series at DC-1</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>                                                                                                                  | 35 A<br>35 A<br>35 A<br>35 A<br>2.9 A<br>1.4 A                                                                         |
| <ul style="list-style-type: none"> <li>● <b>at 1 current path at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>                                                                                                                       | 20 A<br>5 A<br>2.5 A<br>1 A<br>0.09 A<br>0.06 A                                                                        |
| <ul style="list-style-type: none"> <li>● <b>with 2 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>                                                                                                          | 35 A<br>35 A<br>15 A<br>3 A<br>0.27 A<br>0.16 A                                                                        |
| <ul style="list-style-type: none"> <li>● <b>with 3 current paths in series at DC-3 at DC-5</b> <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 60 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>                                                                                                          | 35 A<br>35 A<br>35 A<br>10 A<br>0.6 A<br>0.6 A                                                                         |
| <b>operating power</b> <ul style="list-style-type: none"> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>● at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 3 kW<br>5.5 kW<br>5.5 kW<br>7.5 kW<br><br>3 kW<br>5.5 kW<br>5.5 kW<br>7.5 kW                                           |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> <ul style="list-style-type: none"> <li>● at 400 V rated value</li> <li>● at 690 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 2.6 kW<br>4.6 kW                                                                                                       |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=20 rated value</li> <li>● up to 400 V for current peak value n=20 rated value</li> <li>● up to 500 V for current peak value n=20 rated value</li> <li>● up to 690 V for current peak value n=20 rated value</li> </ul>                                                                                                              | 4.5 kVA<br>7.8 kVA<br>9.8 kVA<br>10.7 kVA                                                                              |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=30 rated value</li> <li>● up to 400 V for current peak value n=30 rated value</li> <li>● up to 500 V for current peak value n=30 rated value</li> <li>● up to 690 V for current peak value n=30 rated value</li> </ul>                                                                                                              | 3 kVA<br>5.2 kVA<br>6.5 kVA<br>9 kVA                                                                                   |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>● limited to 1 s switching at zero current maximum</li> <li>● limited to 5 s switching at zero current maximum</li> </ul>                                                                                                                                                                                                                   | 210 A; Use minimum cross-section acc. to AC-1 rated value<br>210 A; Use minimum cross-section acc. to AC-1 rated value |

|                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• limited to 10 s switching at zero current maximum</li> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul>                                                                                                | 170 A; Use minimum cross-section acc. to AC-1 rated value<br>126 A; Use minimum cross-section acc. to AC-1 rated value<br>105 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b>                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>                                                                                                                                                                                                                                                     | 1 500 1/h<br>1 500 1/h                                                                                                                                                              |
| <b>operating frequency</b>                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> <li>• at AC-4 maximum</li> </ul>                                                                                                                                               | 1 000 1/h<br>1 000 1/h<br>1 000 1/h<br>1 000 1/h<br>300 1/h                                                                                                                         |
| <b>Control circuit/ Control</b>                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                     |
| <b>type of voltage of the control supply voltage</b>                                                                                                                                                                                                                                                                           | AC/DC                                                                                                                                                                               |
| <b>control supply voltage at AC</b>                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>                                                                                                                                                                                                                       | 21 ... 28 V<br>21 ... 28 V                                                                                                                                                          |
| <b>control supply voltage at DC rated value</b>                                                                                                                                                                                                                                                                                | 21 ... 28 V                                                                                                                                                                         |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b>                                                                                                                                                                                                                                          |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>                                                                                                                                                                                                                                  | 0.7<br>1.3                                                                                                                                                                          |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>                                                                                                                                                                                                                                          |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                               | 0.7 ... 1.3<br>0.7 ... 1.3                                                                                                                                                          |
| <b>design of the surge suppressor</b>                                                                                                                                                                                                                                                                                          | with varistor                                                                                                                                                                       |
| <b>inrush current peak</b>                                                                                                                                                                                                                                                                                                     | 3 A                                                                                                                                                                                 |
| <b>duration of inrush current peak</b>                                                                                                                                                                                                                                                                                         | 30 µs                                                                                                                                                                               |
| <b>locked-rotor current mean value</b>                                                                                                                                                                                                                                                                                         | 0.3 A                                                                                                                                                                               |
| <b>locked-rotor current peak</b>                                                                                                                                                                                                                                                                                               | 0.52 A                                                                                                                                                                              |
| <b>duration of locked-rotor current</b>                                                                                                                                                                                                                                                                                        | 180 ms                                                                                                                                                                              |
| <b>holding current mean value</b>                                                                                                                                                                                                                                                                                              | 45 mA                                                                                                                                                                               |
| <b>apparent pick-up power of magnet coil at AC</b>                                                                                                                                                                                                                                                                             |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                               | 6.6 VA<br>6.7 VA                                                                                                                                                                    |
| <b>inductive power factor with closing power of the coil</b>                                                                                                                                                                                                                                                                   |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                               | 0.98<br>0.98                                                                                                                                                                        |
| <b>apparent holding power</b>                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at DC</li> <li>• at maximum rated control supply voltage at DC</li> </ul>                                                                                                                                                                     | 1.4 VA<br>1.4 VA                                                                                                                                                                    |
| <b>apparent holding power</b>                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at minimum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> <li>• at maximum rated control supply voltage at AC <ul style="list-style-type: none"> <li>— at 50 Hz</li> <li>— at 60 Hz</li> </ul> </li> </ul> | 1.9 VA<br>2 VA<br>1.9 VA<br>2 VA                                                                                                                                                    |
| <b>apparent holding power of magnet coil at AC</b>                                                                                                                                                                                                                                                                             |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                               | 1.9 VA<br>2 VA                                                                                                                                                                      |
| <b>inductive power factor with the holding power of the coil</b>                                                                                                                                                                                                                                                               |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                                                                                                                                                                                                                                               | 0.86<br>0.82                                                                                                                                                                        |
| <b>closing power of magnet coil at DC</b>                                                                                                                                                                                                                                                                                      | 5.9 W                                                                                                                                                                               |
| <b>holding power of magnet coil at DC</b>                                                                                                                                                                                                                                                                                      | 1.4 W                                                                                                                                                                               |
| <b>closing delay</b>                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>                                                                                                                                                                                                                                                     | 50 ... 80 ms<br>50 ... 75 ms                                                                                                                                                        |
| <b>opening delay</b>                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                     |

|                                                                                                                                                                                                |                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>                                                                                                                                      | 30 ... 50 ms                                                                                                                         |
| <ul style="list-style-type: none"> <li>• at DC</li> </ul>                                                                                                                                      | 30 ... 50 ms                                                                                                                         |
| <b>arcing time</b>                                                                                                                                                                             | 10 ... 10 ms                                                                                                                         |
| <b>control version of the switch operating mechanism</b>                                                                                                                                       | Standard A1 - A2                                                                                                                     |
| <b>Auxiliary circuit</b>                                                                                                                                                                       |                                                                                                                                      |
| number of NC contacts for auxiliary contacts instantaneous contact                                                                                                                             | 1                                                                                                                                    |
| number of NO contacts for auxiliary contacts instantaneous contact                                                                                                                             | 1                                                                                                                                    |
| operational current at AC-12 maximum                                                                                                                                                           | 10 A                                                                                                                                 |
| <b>operational current at AC-15</b>                                                                                                                                                            |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> </ul>                                                                                                                       | 10 A                                                                                                                                 |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>                                                                                                                       | 3 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>                                                                                                                       | 2 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>                                                                                                                       | 1 A                                                                                                                                  |
| <b>operational current at DC-12</b>                                                                                                                                                            |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>                                                                                                                        | 10 A                                                                                                                                 |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                                                                                                                        | 6 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                                                                                                                        | 6 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                                                                                                                       | 3 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>                                                                                                                       | 2 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                                                                                                                       | 1 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                                                                                                                       | 0.15 A                                                                                                                               |
| <b>operational current at DC-13</b>                                                                                                                                                            |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>                                                                                                                        | 10 A                                                                                                                                 |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                                                                                                                        | 2 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                                                                                                                        | 2 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                                                                                                                       | 1 A                                                                                                                                  |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>                                                                                                                       | 0.9 A                                                                                                                                |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                                                                                                                       | 0.3 A                                                                                                                                |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                                                                                                                       | 0.1 A                                                                                                                                |
| <b>contact reliability of auxiliary contacts</b>                                                                                                                                               | 1 faulty switching per 100 million (17 V, 1 mA)                                                                                      |
| <b>UL/CSA ratings</b>                                                                                                                                                                          |                                                                                                                                      |
| <b>full-load current (FLA) for 3-phase AC motor</b>                                                                                                                                            |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> </ul>                                                                                                                       | 11 A                                                                                                                                 |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                                                                                                                       | 11 A                                                                                                                                 |
| <b>yielded mechanical performance [hp]</b>                                                                                                                                                     |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> </ul> </li> </ul>                                    | 1 hp                                                                                                                                 |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at 230 V rated value</li> </ul> </li> </ul>                                                                   | 2 hp                                                                                                                                 |
| <ul style="list-style-type: none"> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> </ul> </li> </ul>                                         | 3 hp                                                                                                                                 |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at 220/230 V rated value</li> </ul> </li> </ul>                                                               | 3 hp                                                                                                                                 |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at 460/480 V rated value</li> </ul> </li> </ul>                                                               | 7.5 hp                                                                                                                               |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— at 575/600 V rated value</li> </ul> </li> </ul>                                                               | 10 hp                                                                                                                                |
| <b>contact rating of auxiliary contacts according to UL</b>                                                                                                                                    | A600 / P600                                                                                                                          |
| <b>Short-circuit protection</b>                                                                                                                                                                |                                                                                                                                      |
| <b>design of the fuse link</b>                                                                                                                                                                 |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> </ul> </li> </ul> | gG: 63A (690V,100kA), aM: 32A (690V,100kA), BS88: 63A (415V,80kA)                                                                    |
| <ul style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>— with type of assignment 2 required</li> </ul> </li> </ul>                                                     | gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA)                                                                    |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>                                                                              | gG: 10 A (500 V, 1 kA)                                                                                                               |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                      |                                                                                                                                      |
| <b>mounting position</b>                                                                                                                                                                       | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>fastening method</b>                                                                                                                                                                        | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715                                                             |
| <b>height</b>                                                                                                                                                                                  | 102 mm                                                                                                                               |
| <b>width</b>                                                                                                                                                                                   | 45 mm                                                                                                                                |
| <b>depth</b>                                                                                                                                                                                   | 107 mm                                                                                                                               |
| <b>required spacing</b>                                                                                                                                                                        |                                                                                                                                      |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting</li> </ul>                                                                                                                 |                                                                                                                                      |

|                                                                      |                                   |
|----------------------------------------------------------------------|-----------------------------------|
| — forwards                                                           | 10 mm                             |
| — upwards                                                            | 10 mm                             |
| — downwards                                                          | 10 mm                             |
| — at the side                                                        | 0 mm                              |
| • for grounded parts                                                 |                                   |
| — forwards                                                           | 10 mm                             |
| — upwards                                                            | 10 mm                             |
| — at the side                                                        | 6 mm                              |
| — downwards                                                          | 10 mm                             |
| • for live parts                                                     |                                   |
| — forwards                                                           | 10 mm                             |
| — upwards                                                            | 10 mm                             |
| — downwards                                                          | 10 mm                             |
| — at the side                                                        | 6 mm                              |
| <b>Connections/ Terminals</b>                                        |                                   |
| <b>type of electrical connection</b>                                 |                                   |
| • for main current circuit                                           | spring-loaded terminals           |
| • for auxiliary and control circuit                                  | spring-loaded terminals           |
| • at contactor for auxiliary contacts                                | Spring-type terminals             |
| • of magnet coil                                                     | Spring-type terminals             |
| <b>type of connectable conductor cross-sections</b>                  |                                   |
| • for main contacts                                                  |                                   |
| — solid                                                              | 2x (1 ... 10 mm <sup>2</sup> )    |
| — solid or stranded                                                  | 2x (1 ... 10 mm <sup>2</sup> )    |
| — finely stranded with core end processing                           | 2x (1 ... 6 mm <sup>2</sup> )     |
| — finely stranded without core end processing                        | 2x (1 ... 6 mm <sup>2</sup> )     |
| • for AWG cables for main contacts                                   | 2x (18 ... 8)                     |
| <b>connectable conductor cross-section for main contacts</b>         |                                   |
| • solid                                                              | 1 ... 10 mm <sup>2</sup>          |
| • stranded                                                           | 1 ... 10 mm <sup>2</sup>          |
| • finely stranded with core end processing                           | 1 ... 6 mm <sup>2</sup>           |
| • finely stranded without core end processing                        | 1 ... 6 mm <sup>2</sup>           |
| <b>connectable conductor cross-section for auxiliary contacts</b>    |                                   |
| • solid or stranded                                                  | 0.5 ... 2.5 mm <sup>2</sup>       |
| • finely stranded with core end processing                           | 0.5 ... 1.5 mm <sup>2</sup>       |
| • finely stranded without core end processing                        | 0.5 ... 2.5 mm <sup>2</sup>       |
| <b>type of connectable conductor cross-sections</b>                  |                                   |
| • for auxiliary contacts                                             |                                   |
| — solid or stranded                                                  | 2x (0.5 ... 2.5 mm <sup>2</sup> ) |
| — finely stranded with core end processing                           | 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| — finely stranded without core end processing                        | 2x (0.5 ... 2.5 mm <sup>2</sup> ) |
| • for AWG cables for auxiliary contacts                              | 2x (20 ... 14)                    |
| <b>AWG number as coded connectable conductor cross section</b>       |                                   |
| • for main contacts                                                  | 18 ... 8                          |
| • for auxiliary contacts                                             | 20 ... 14                         |
| <b>Safety related data</b>                                           |                                   |
| <b>product function</b>                                              |                                   |
| • mirror contact according to IEC 60947-4-1                          | Yes                               |
| • positively driven operation according to IEC 60947-5-1             | No                                |
| • suitable for safety function                                       | Yes                               |
| suitability for use safety-related switching OFF                     | Yes                               |
| <b>service life maximum</b>                                          | 20 a                              |
| <b>test wear-related service life necessary</b>                      | Yes                               |
| <b>proportion of dangerous failures</b>                              |                                   |
| • with low demand rate according to SN 31920                         | 40 %                              |
| • with high demand rate according to SN 31920                        | 73 %                              |
| <b>B10 value with high demand rate according to SN 31920</b>         | 1 000 000                         |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 100 FIT                           |
| ISO 13849                                                            |                                   |

|                                                         |                                                  |
|---------------------------------------------------------|--------------------------------------------------|
| device type according to ISO 13849-1                    | 3                                                |
| overdimensioning according to ISO 13849-2 necessary     | Yes                                              |
| IEC 61508                                               |                                                  |
| safety device type according to IEC 61508-2             | Type A                                           |
| Electrical Safety                                       |                                                  |
| protection class IP on the front according to IEC 60529 | IP20                                             |
| touch protection on the front according to IEC 60529    | finger-safe, for vertical contact from the front |

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



[KC](#)

| General Product Approval | EMV | Functional Safety | Test Certificates |
|--------------------------|-----|-------------------|-------------------|
|--------------------------|-----|-------------------|-------------------|



[Type Examination Certificate](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Miscellaneous](#)

#### Marine / Shipping



| other | Railway | Dangerous goods | Environment |
|-------|---------|-----------------|-------------|
|-------|---------|-----------------|-------------|

[Miscellaneous](#)

[Confirmation](#)

[Confirmation](#)

[Special Test Certificate](#)

[Transport Information](#)



#### Environment

[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2024-2NB30>

##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2024-2NB30>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-2NB30>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)





[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2024-2NB30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2024-2NB30&lang=en)


##### Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2024-2NB30/char>

##### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2024-2NB30&objecttype=14&gridview=view1>

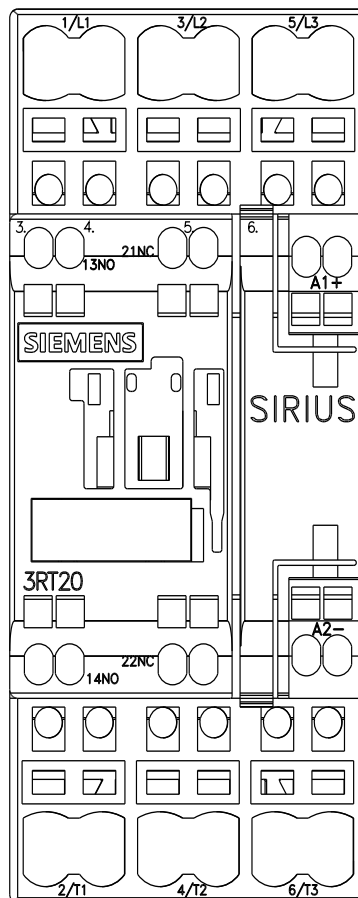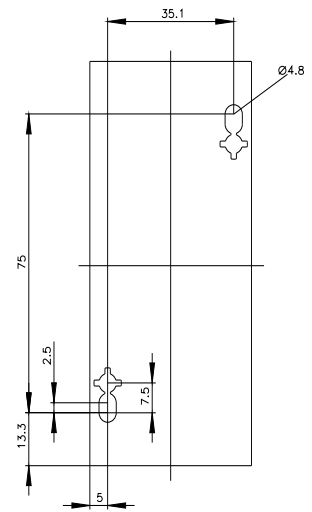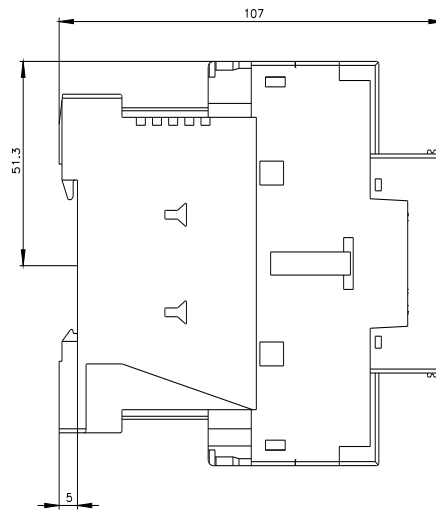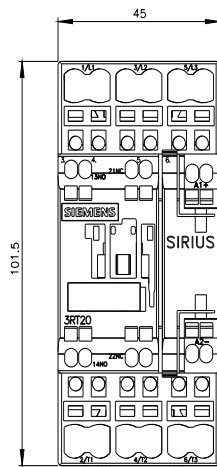

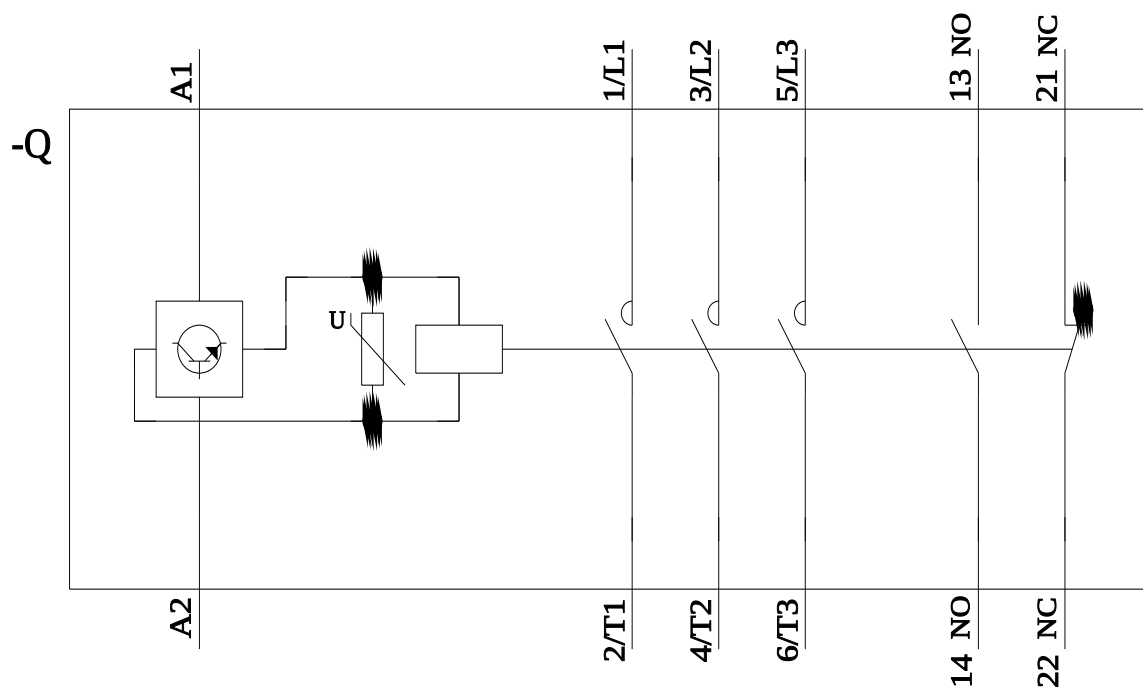

last modified:

